
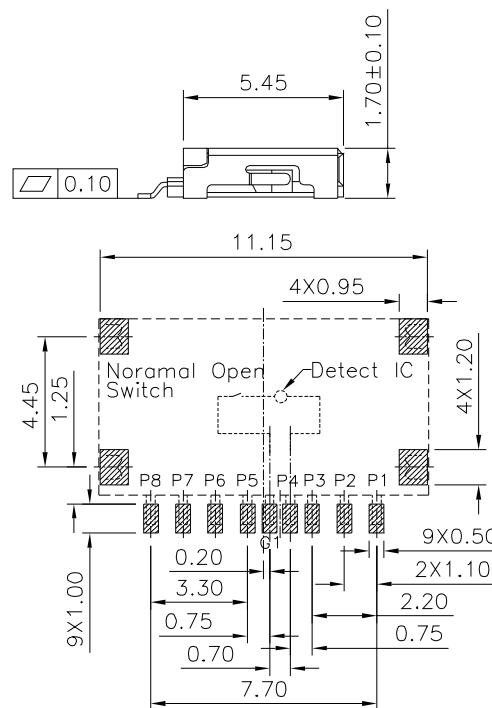
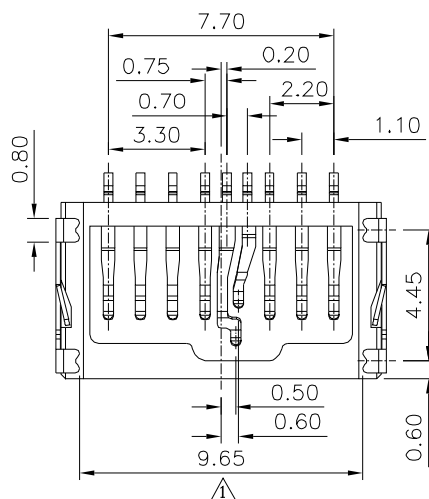


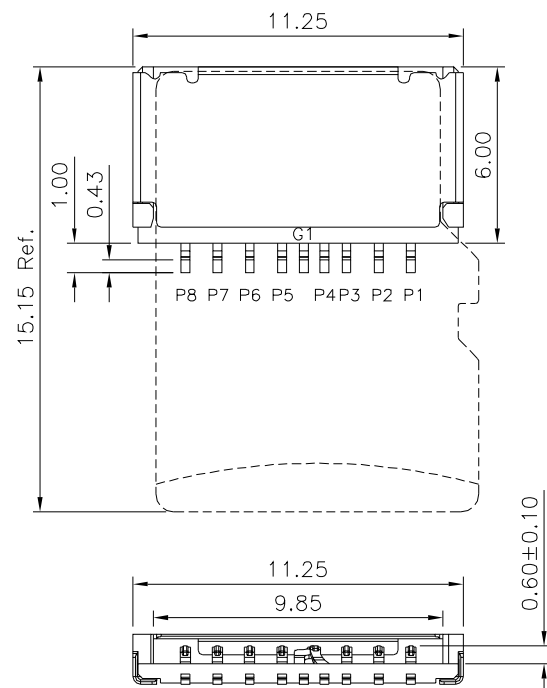

Recommended P.C.B. Layout
(PCB Board Tolerance±0.05)

SPECIFICATION

1.Material&Finish

Contact:Phosphor Bronze,Gold Flash On Contact Area,
Gold Flash On Solder Tails,Over Nickel
Insulator:LCP(UL94V-0)
Shell:Stainless Steel,Gold Flash On Solder Tails,
Over Nickel

2.Electrical Characteristics

Current Rating:0.5A Max.
Voltage Rating:100V AC RMS
Contact Resistance:100 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
At 500V DC

3.Mechanical Characteristics

Operating Life:3000 Cycles

4.Environmental Characteristics

Ambient Temperature Range:-25°C~+85°C

5.RoHS Compliant

P8	DAT1
P7	DAT0
P6	VSS
P5	CLK
G1	Switch
P4	VDD
P3	CMD
P2	CD/DAT3
P1	DAT2
Pin No.	Description

Micro SD Card Connector Short Body
<https://www.sunrom.com/m/7425>

DRAWING No.

7425

SCALE

NONE

APPROVED BY

ME

CHECKED BY

HZ

DRAWING BY


CY

REV.

A1

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
X.±0.45 X.±5°
.X±0.35 .X°±2°
.XX±0.25 .XX°±1°
.XXX±0.15 .XXX°±0.5°

UNIT
mm



NO. REV.

REVISIONS

CHK

DATE

A1 Modify Data HZ 05/02/2023

A0 NEW RELEASE HZ 06/21/2019