
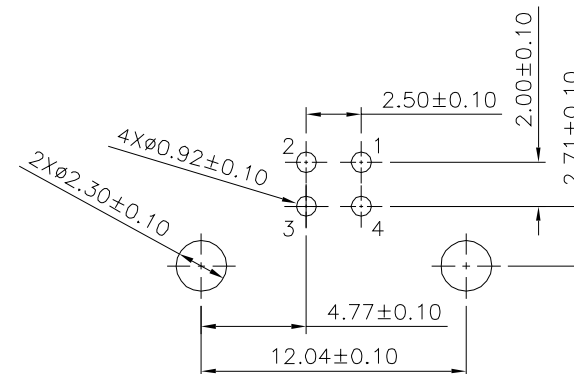
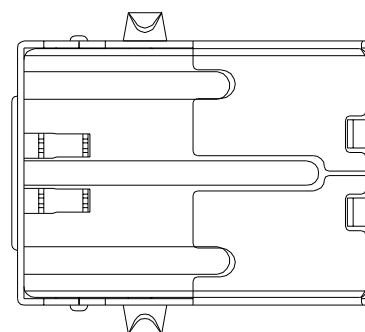
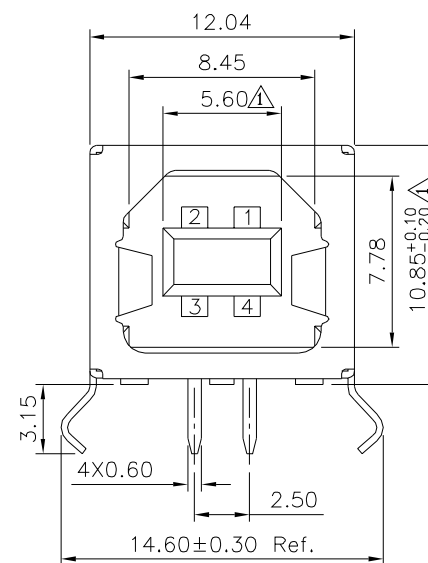


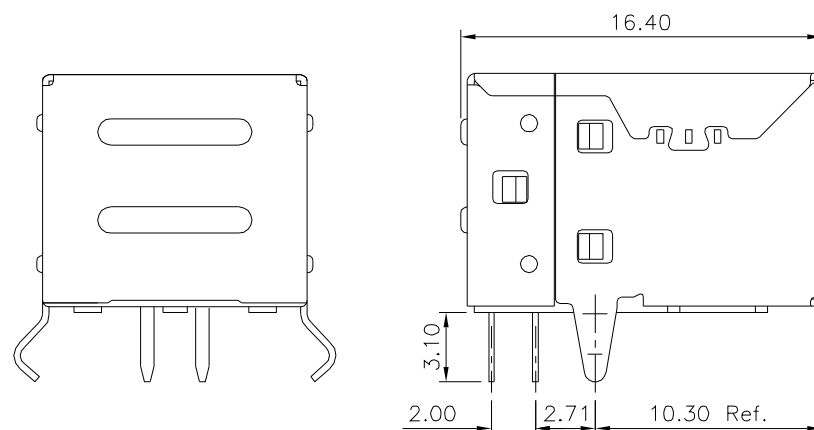

Recommended P.C.B. Layout(Component Side)

Tolerance:±0.05

SPECIFICATION

Current Rating:1.5A
 Voltage:30V Max.
 Withstanding Voltage:500V AC For 1 Minute
 Contact Resistance:30 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Temperature Range:-55°C~+85°C
 Mating Force:35N Max.
 Withdrawal Force:10N Min.
 Durability:1500 Cycles Min.
 Contact:Phosphor Bronze
 Gold Flash On Contact Area,Tin
 Plated On Solder Tails,Over Nickel
 Insulator:PBT+30%G.F.(UL94V-0)
 Front Shell:Brass,Nickel Plated
 Back Shell:Steel,Nickel Plated
 RoHS Compliant

USB B-type Female Right Angle PCB Mount
<https://www.sunrom.com/m/3966>

DRAWING No.

3966

SCALE

NONE

APPROVED BY

ME

CHECKED BY

HZ

DRAWING BY

HA

REV.

B1

 UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE

.X ±0.38 .X* ±2*
 .XX ±0.25 .XX* ±1*
 .XXX ±0.13 .XXX* ±0.5*

UNIT

mm



NO.

REV.

B1

Modify Data

B0

NEW RELEASE

CH

REVISIONS

HZ

HZ

12/23/2022

10/13/2015

DATE