



HT6220A/HT6221A/HT6221B/HT6222A

*Multi-Purpose Encoders***Features**

- Operating voltage: 2.0V~3.6V
- DOUT with 38kHz carrier for IR medium
- Low standby current
- Minimum transmission word: one word
- Build-in RC (Internal RC) oscillator
- 16-bit address codes
- 8-bit data codes
- PPM code method
- Three double-active keys
- Maximum active keys
- HT6220A: 6 keys (8SOP) or 30 keys (16NSOP)
- HT6221A: 32 keys
- HT6221B: 48 keys
- HT6222A: 64 keys
- Low power and high noise immunity CMOS technology
- HT6220A: selection of 16-pin NSOP or 8-pin SOP package
- HT6221A/HT6221B: 20-pin SOP package
- HT6222A: 24-pin SOP package

Applications

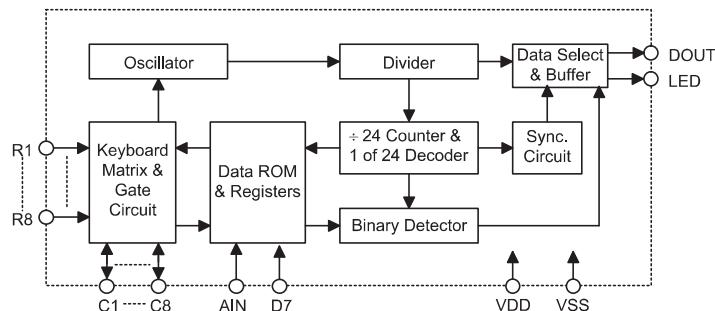
- Television , setup box and DVD player controllers
- Burglar alarm systems
- Smoke and fire alarm systems
- Garage door controllers
- Car door controllers
- Car alarm systems
- Security systems
- Other remote control systems

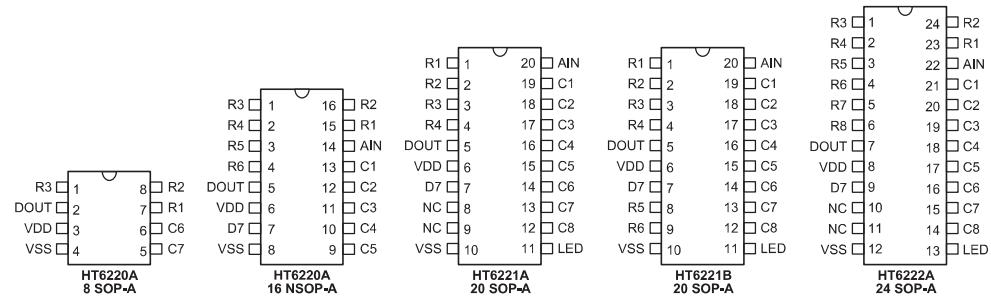
General Description

The devices are CMOS LSI encoders designed for use in remote control systems. They are capable of encoding 16-bit address codes and 8-bit data codes. Each address/data input can be set to one of the two logic states, 0 and 1.

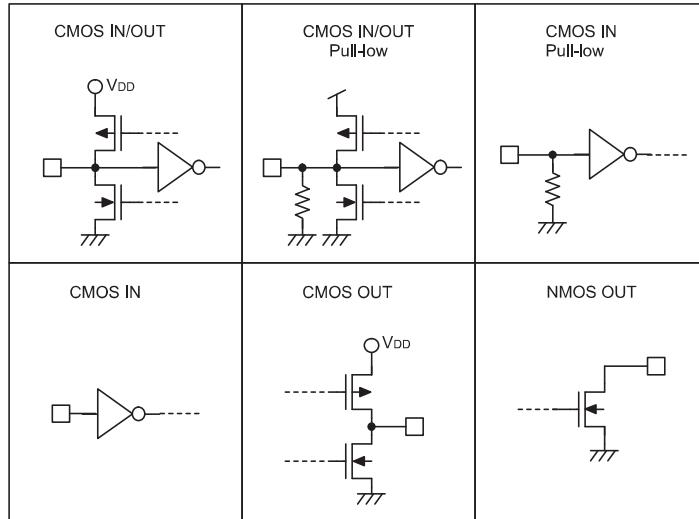
The HT6220A/HT6221A/HT6221B/HT6222A contain 6keys (K21~K23, K25~K27) or 30keys (K1~K20, K33~K34, K37~K38, K41~K42, K45~K46, K49~K50),

32 keys (K1~K32), 48 keys (K1~K32, K33~K34, K37~K38, K41~K42, K45~K46, K49~K50, K53~K54, K57~K58, K61~K62) and 64 keys (K1~K64), respectively. When one of the keys is triggered, the programmed address/data is transmitted together with the header bits via an IR (38kHz carrier) transmission medium.

Block Diagram

**Pin Assignment****Pin Description****HT6222A**

| Pin No. | Pin Name | I/O | Internal Connection | Description |
|---------|----------|-----|--------------------------------|---|
| 1~6 | R3~R8 | I | CMOS IN, Pull-low | Row control for keyboard matrix, active high |
| 7 | DOUT | O | NMOS OUT | Serial data output pin, with a 38kHz carrier |
| 8 | VDD | — | — | Positive power supply, 2.0V~3.6V for normal operation |
| 9 | D7 | I | CMOS IN | Most significant data bit (D7) code setting |
| 10, 11 | NC | — | — | No connection |
| 12 | VSS | — | — | Negative power supply, ground |
| 13 | LED | O | CMOS OUT | Transmission enable indicator output |
| 14~21 | C8~C1 | I/O | CMOS IN/OUT, Pull-low | Column control for keyboard matrix |
| 22 | AIN | I | CMOS IN, Pull-high Pull-low | Low byte address codes (8 bits) scan input |
| 23~24 | R1~R2 | I | CMOS IN, Pull-low | Row control for keyboard matrix, active high |

Approximate Internal Connection Circuits

**Absolute Maximum Ratings**

| | | | |
|----------------------|----------------------------------|----------------------------|----------------|
| Supply Voltage | V_{SS} –0.3V to V_{SS} +6V | Storage Temperature | –50°C to 125°C |
| Input Voltage..... | V_{SS} –0.3V to V_{DD} +0.3V | Operating Temperature..... | –20°C to 75°C |

Note: These are stress ratings only. Stresses exceeding the range specified under "Absolute Maximum Ratings" may cause substantial damage to the device. Functional operation of this device at other conditions beyond those listed in the specification is not implied and prolonged exposure to extreme conditions may affect device reliability.

Electrical Characteristic

Ta=25°C

| Symbol | Parameter | Test Conditions | | Min. | Typ. | Max. | Unit |
|-----------|-------------------------------------|-----------------|----------------------------|--------|------|--------|------------|
| | | V_{DD} | Conditions | | | | |
| V_{DD} | Operating Voltage | — | — | 2.0 | 3.0 | 3.6 | V |
| I_{STB} | Standby Current | 3V | Oscillator stops | — | 0.1 | 1.0 | μ A |
| I_{DD} | Operating Current | 3V | f_{OSC} =455kHz, no load | — | 600 | 900 | μ A |
| I_{OL1} | Output Sink Current for DOUT | 3V | V_O =0.6V | 300 | 350 | — | mA |
| I_{OH2} | Output Source Current for LED | 3V | V_O =2.7V | -10 | -60 | — | μ A |
| I_{OL2} | Output Sink Current for LED | 3V | V_O =0.3V | 1 | 2 | — | mA |
| I_{OH3} | Output Source Current for C1~C8 | 3V | V_O =2.7V | -0.6 | -2.0 | — | mA |
| I_{OL3} | Output Sink Current for C1~C8 | 3V | V_O =0.3V | 10 | 30 | — | μ A |
| V_{IH1} | Input High Voltage for R1~R8 | 3V | — | 1.9 | — | 3.0 | V |
| V_{IL1} | Input Low Voltage for R1~R8 | 3V | — | 0 | — | 0.8 | V |
| V_{IH2} | Input High Voltage for C1~C8 | 3V | — | 1.6 | — | 3.0 | V |
| V_{IL2} | Input Low Voltage for C1~C8 | 3V | — | 0 | — | 0.6 | V |
| V_{IH3} | Input High Voltage for AIN | 3V | — | 1.5 | — | 3.0 | V |
| V_{IL3} | Input Low Voltage for AIN | 3V | — | 0 | — | 0.6 | V |
| R_{PH1} | Input Pull-high Resistance for AIN | 3V | V_{IN} =0V | 100 | 200 | 400 | k Ω |
| R_{PL1} | Input Pull-low Resistance for AIN | 3V | V_{IN} =3V | 70 | 150 | 250 | k Ω |
| R_{PL2} | Input Pull-low Resistance for R1~R8 | 3V | V_{IN} =3V | 120 | 200 | 320 | k Ω |
| R_{PL3} | Input Pull-low Resistance for C1~C8 | 3V | V_{IN} =3V | 300 | 500 | 1500 | k Ω |
| f_{osc} | System Frequency | 3V | Ta=25°C | 450.45 | 455 | 459.55 | kHz |
| | | 2.0V~3.6V | 0°C < Ta < 70°C | 445.90 | 455 | 464.10 | kHz |

Note: f_{osc} specification is guaranteed by design under 0°C < Ta < 70°C and not subject to production testing.




Functional Description

Keyboard Scan


The devices remain in the halt mode during the standby state (at this time, the oscillator stops, and the standby current <1μA). The HT6220A consists of 6 (8SOP) or 30 (16NSOP) active keys, HT6221A has 32 active keys, HT6221B has 48 active keys, and the HT6222A has 64 active keys. The keyboard forms of the devices are shown below.

- The HT6220A keyboard form

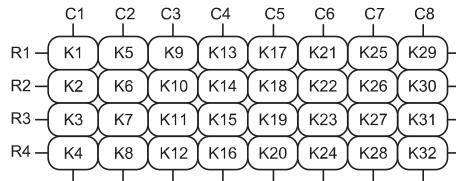
8-pin SOP Package



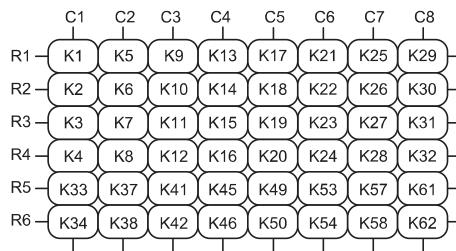
16-pin NSOP Package



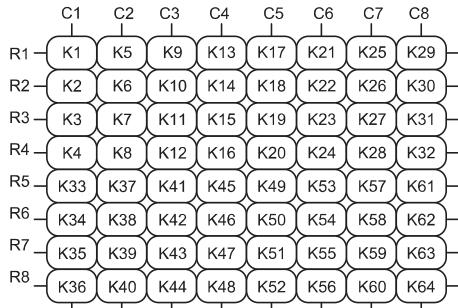
- The HT6221A keyboard form



- The HT6221B keyboard form



- The HT6222A keyboard form



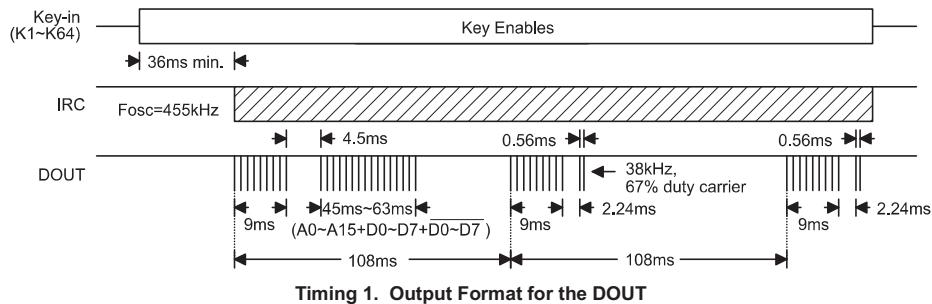
When one of the keys (6, 30, 32, 48 or 64 keys) is triggered for over 36ms, the oscillator is enabled and the chip is activated. If the key is pressed and held for 108ms or less, the 108ms transmission codes are enabled and comprised of a header code (9ms), an off code (4.5ms), low byte address codes (9ms~18ms), high byte address codes (9ms~18ms), 8-bit data codes (9ms~18ms), and the inverse codes of the 8-bit data codes (18ms~9ms). After the pressed key is held for 108ms, if the key is still held down, the transmission codes turn out to be a composition of header (9ms) and off codes (2.24ms) only.

To avoid mistakes made by keyboard scanning or simultaneous two-key inputs (except for the three double-key active functions (K21+K22, K21+K23, and K21+K24)), the devices are facilitated with 36ms starting time.

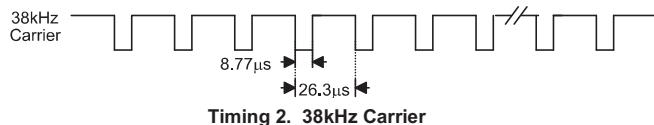
The HT6220A (8SOP) and HT6221A/HT6221B/HT6222A also provide two double-key active functions (K21+K22 and K21+K23), and three double-key active functions (K21+K22, K21+K23 and K21+K24) respectively for tape deck recording operations. The double-key operation rules are shown in timing 4 and timing 6.

**Transmission Codes**

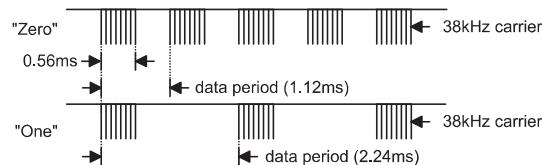
The transmission codes of the devices consist of a 9ms header code, a 4.5ms off code, 16-bit address codes (18ms~36ms), 9ms~18ms 8-bit data codes, and the inverse code of the 8-bit data codes. The following is an illustration of the transmission codes.

**Timing 1. Output Format for the DOUT**

The output code carrier of the DOUT pin is shown in Timing 2.

**Timing 2. 38kHz Carrier**

The transmission codes employ the PPM (Pulse Position Modulation) method to represent their two logic states by "0" (1.12ms) and "1" (2.24ms) as shown in Timing 3.

**Timing 3. Logic States**



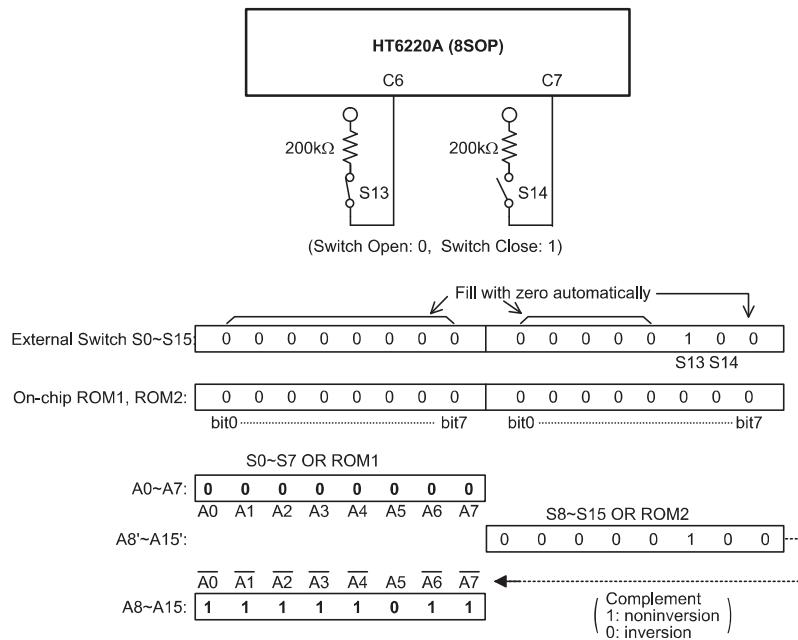
- Setting the address codes (A0~A15)

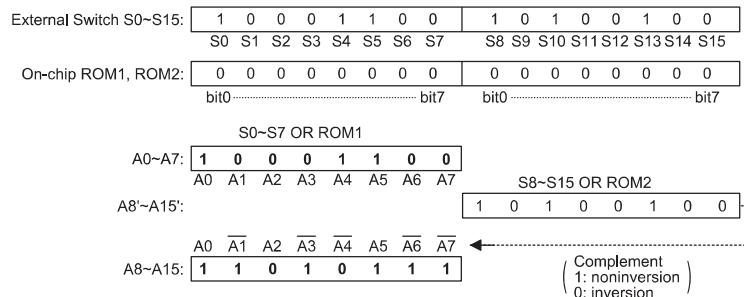
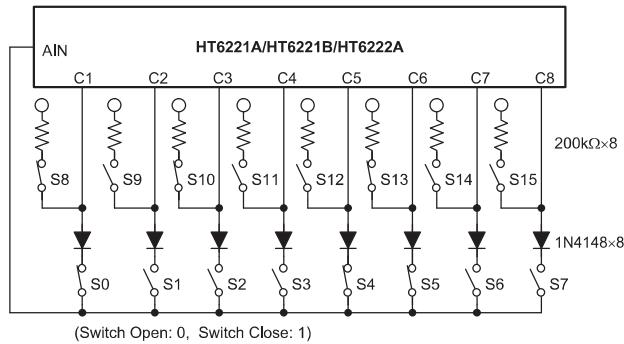
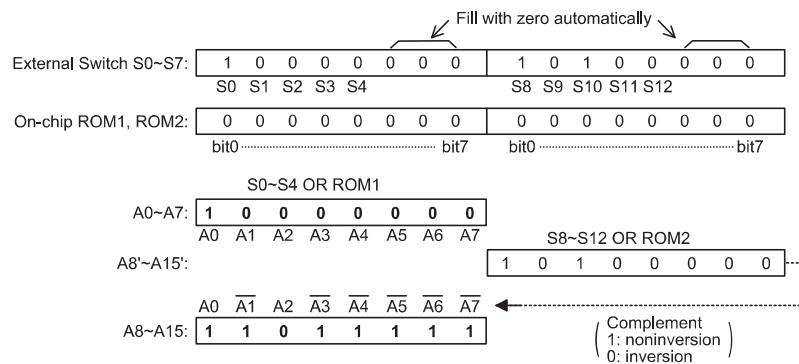
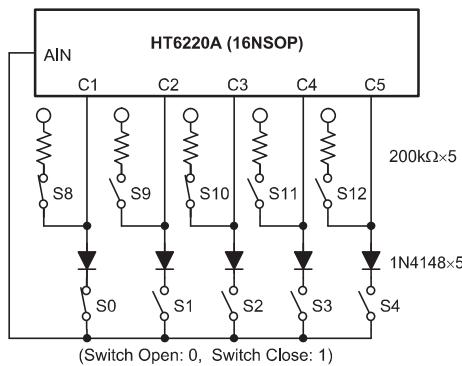
The algorithm rule of the address codes (A0~A15) can be selected by mask option.

In this case, the 16-bit on-chip MASK ROM (ROM1 and ROM2) are available, and the value of ROM1 (8 bits) and ROM2 (8 bits) are decided by one MASK LAYER. The current value of ROM1 and ROM2 are both "00H". The A0~A7 are set by logical OR between the external switch S0~S7 and the ROM1. The A8~A15 equal some bits inverted to A0~A7, the inversion are decided by Logical OR between the external switch S8~S15 and the ROM2.

For example:

The following is an illustration of these rules in selecting the address codes (A0~A15).



**HT6220A/HT6221A/HT6221B/HT6222A**


HT6220A/HT6221A/HT6221B/HT6222A

- Values of the data codes (D0~D7)

The HT6220A/HT6221A/HT6221B/HT6222A contain 6 (8SOP) or 30 (16NSOP), 32, 48 and 64 active keys, respectively. Each key corresponds to a data code. For tape deck recording, the HT6220A (8SOP) provides two double-key and the HT6221A/HT6221B/HT6222A provide three double-key functions. The double-key, single-key, and double-key operation rules are shown in Table 3, Table 4, Timing 4, Timing 5 and Timing 6.

Table 3: Double-key data code table

| KEY | Data Codes D0~D6 | Data Code D7 |
|-----------|------------------|--------------|
| K21 + K22 | 1010110 | 0/1 |
| K21 + K23 | 0110110 | 0/1 |
| K21 + K24 | 1110110 | 0/1 |

Note: 1. D7 is defined by an external switch

2. In 8SOP package of HT6220A. The data code D7 is set to "1" only.

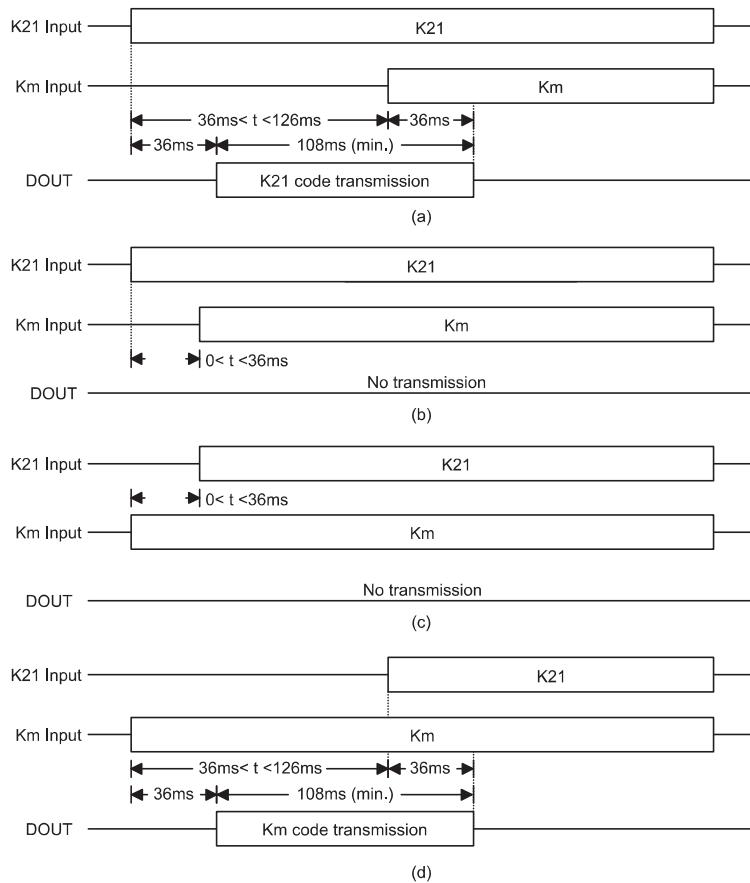
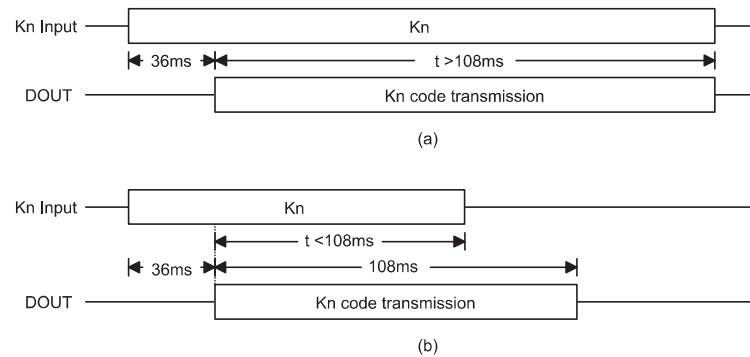
Table 4: K1~K64 single-key data code table

| KEY | Data Codes D0~D6 | Data Code D7 | KEY | Data Codes D0~D6 | Data Code D7 |
|-----|------------------|--------------|-----|------------------|--------------|
| K1 | 0000 000 | 0/1 | K33 | 0000 001 | 0/1 |
| K2 | 1000 000 | 0/1 | K34 | 1000 001 | 0/1 |
| K3 | 0100 000 | 0/1 | K35 | 0100 001 | 0/1 |
| K4 | 1100 000 | 0/1 | K36 | 1100 001 | 0/1 |
| K5 | 0010 000 | 0/1 | K37 | 0010 001 | 0/1 |
| K6 | 1010 000 | 0/1 | K38 | 1010 001 | 0/1 |
| K7 | 0110 000 | 0/1 | K39 | 0110 001 | 0/1 |
| K8 | 1110 000 | 0/1 | K40 | 1110 001 | 0/1 |
| K9 | 0001 000 | 0/1 | K41 | 0001 001 | 0/1 |
| K10 | 1001 000 | 0/1 | K42 | 1001 001 | 0/1 |
| K11 | 0101 000 | 0/1 | K43 | 0101 001 | 0/1 |
| K12 | 1101 000 | 0/1 | K44 | 1101 001 | 0/1 |
| K13 | 0011 000 | 0/1 | K45 | 0011 001 | 0/1 |
| K14 | 1011 000 | 0/1 | K46 | 1011 001 | 0/1 |
| K15 | 0111 000 | 0/1 | K47 | 0111 001 | 0/1 |
| K16 | 1111 000 | 0/1 | K48 | 1111 001 | 0/1 |
| K17 | 0000 100 | 0/1 | K49 | 0000 101 | 0/1 |
| K18 | 1000 100 | 0/1 | K50 | 1000 101 | 0/1 |
| K19 | 0100 100 | 0/1 | K51 | 0100 101 | 0/1 |
| K20 | 1100 100 | 0/1 | K52 | 1100 101 | 0/1 |
| K21 | 0010 100 | 0/1 | K53 | 0010 101 | 0/1 |
| K22 | 1010 100 | 0/1 | K54 | 1010 101 | 0/1 |
| K23 | 0110 100 | 0/1 | K55 | 0110 101 | 0/1 |
| K24 | 1110 100 | 0/1 | K56 | 1110 101 | 0/1 |
| K25 | 0001 100 | 0/1 | K57 | 0001 101 | 0/1 |
| K26 | 1001 100 | 0/1 | K58 | 1001 101 | 0/1 |
| K27 | 0101 100 | 0/1 | K59 | 0101 101 | 0/1 |
| K28 | 1101 100 | 0/1 | K60 | 1101 101 | 0/1 |
| K29 | 0011 100 | 0/1 | K61 | 0011 101 | 0/1 |
| K30 | 1011 100 | 0/1 | K62 | 1011 101 | 0/1 |
| K31 | 0111 100 | 0/1 | K63 | 0111 101 | 0/1 |
| K32 | 1111 100 | 0/1 | K64 | 1111 101 | 0/1 |

Note: D7 is defined by an external switch

D7=0 : connect to VDD

D7=1 : connect to VSS

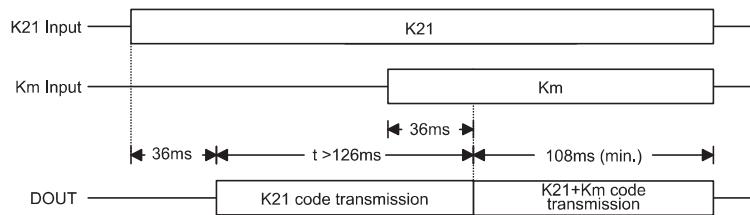
**HT6220A/HT6221A/HT6221B/HT6222A****Timing 4. Invalid Double-Key Input**

Note: Kn can be one of K1~K64

Timing 5. Valid Single-Key Input



HT6220A/HT6221A/HT6221B/HT6222A



Note: Km can be one of K22~K24

Timing 6. Valid Double-Key Input

DOUT and IR LED

After the transmission codes are sent, the DOUT pin generates transmission codes with a carrier, and the IR-LED goes low to drive a transmission indicator. The DOUT pin abbreviate exterior transistor, to provide large current driving ability.

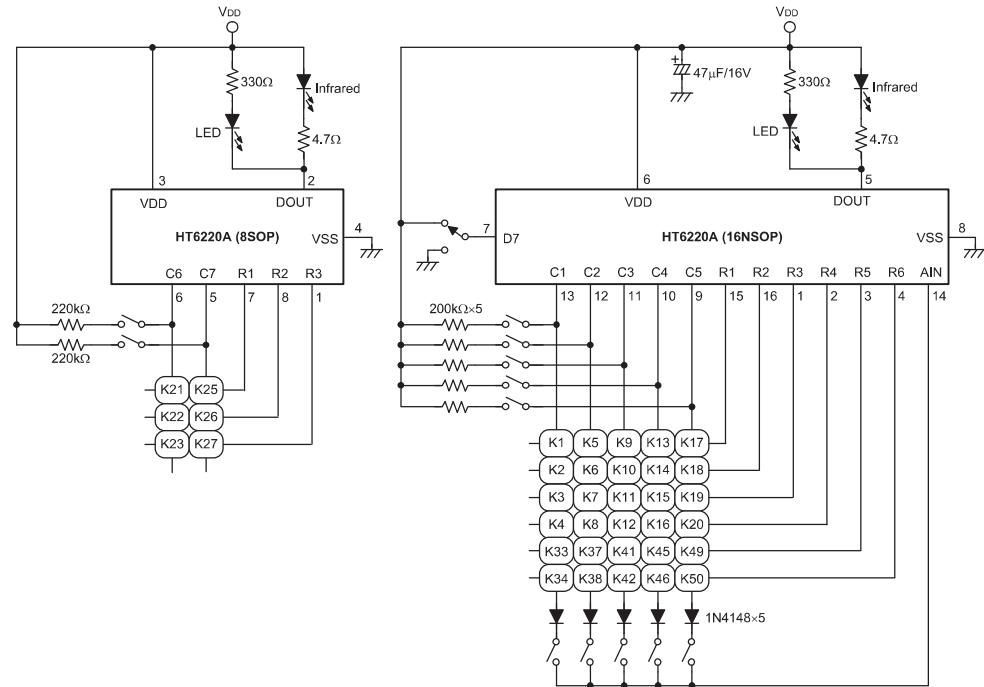
IRC

The frequency of the internal RC(IRC) oscillator is depending on the temperature and operating voltage.

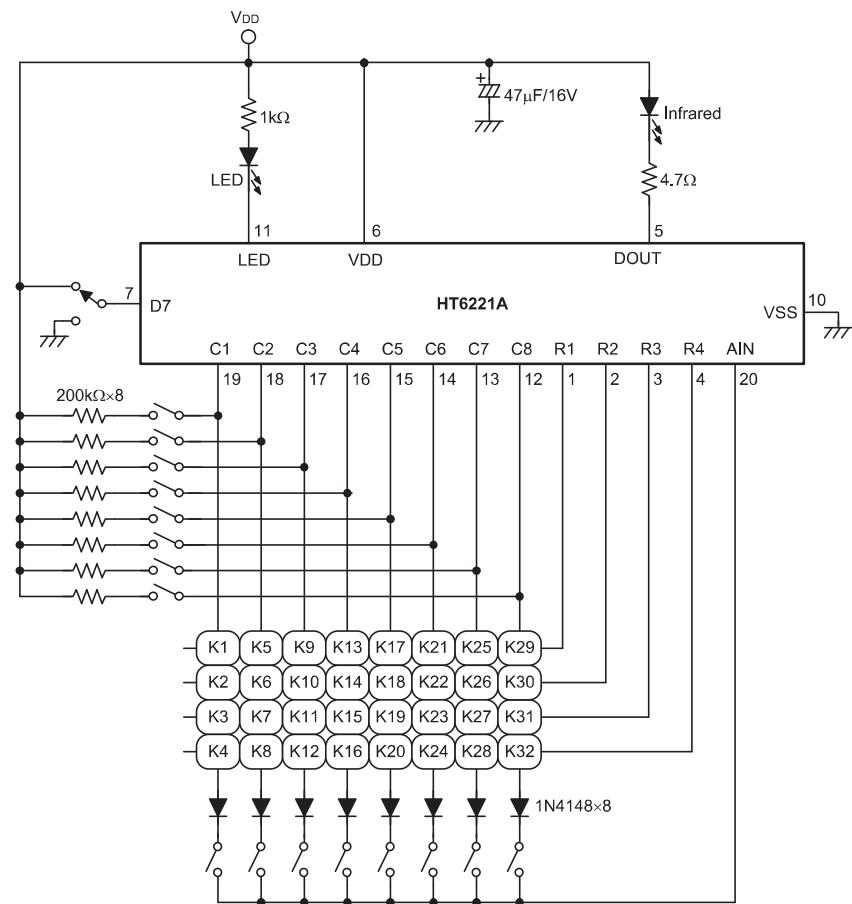
At $T_a=25^\circ\text{C}$ at 3.0V, the IRC has an accuracy of ± 1 per cent. In the range of 0°C to 70°C at 2.0V~3.6V, the accuracy value of the RC frequency increases to the maximum value of ± 2 per cent.

Application Circuits

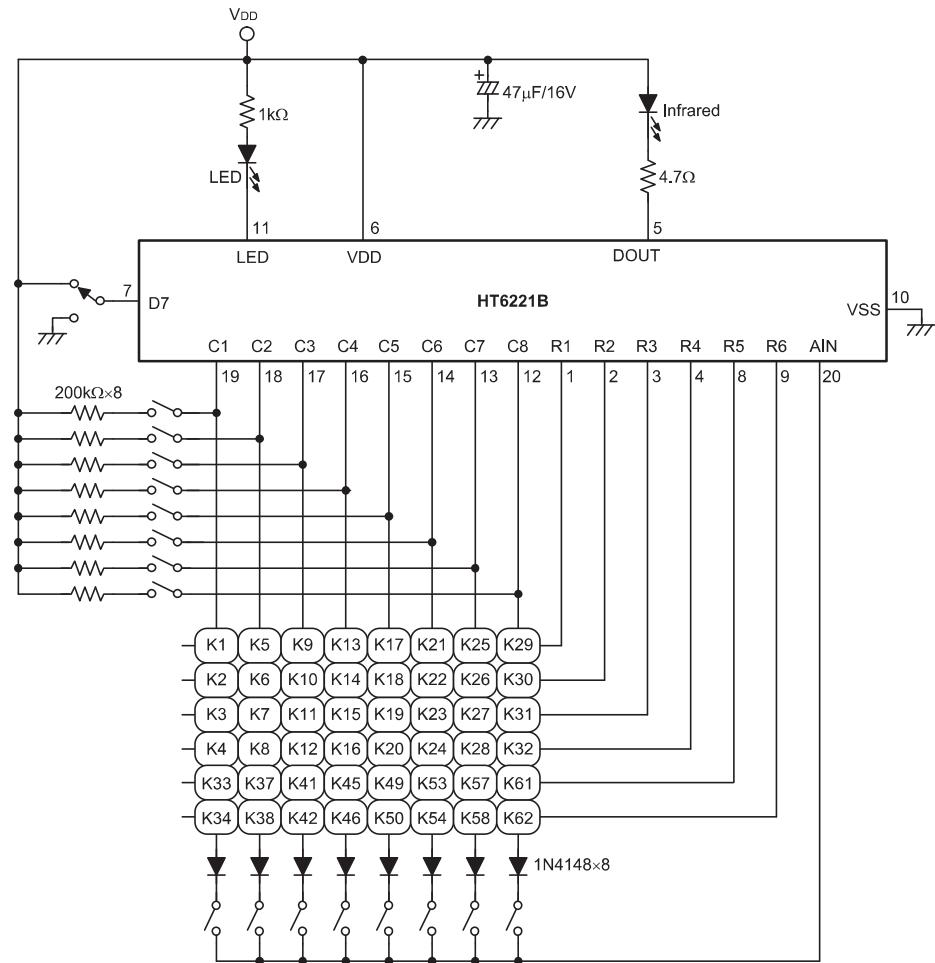
HT6220A Application Circuit



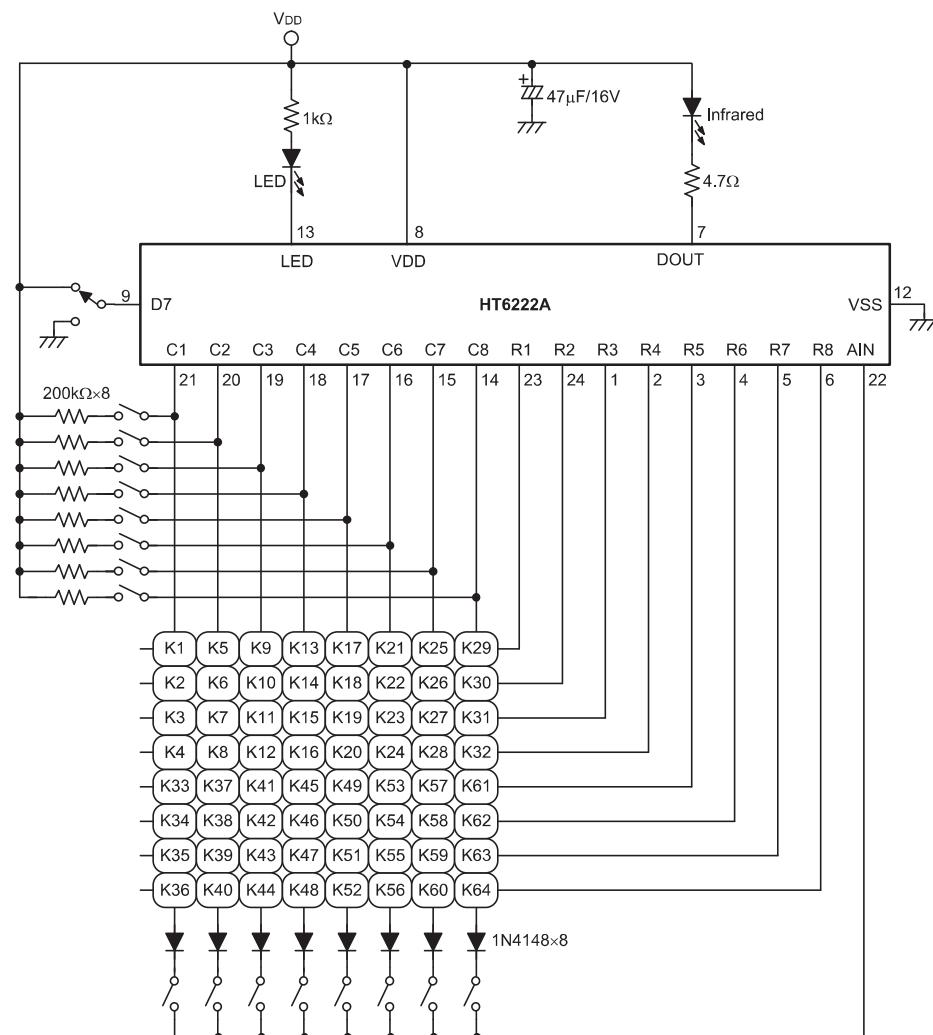
Note: Typical infrared diode: EL-1L2 (CORP.)

**HT6221A Application Circuit**

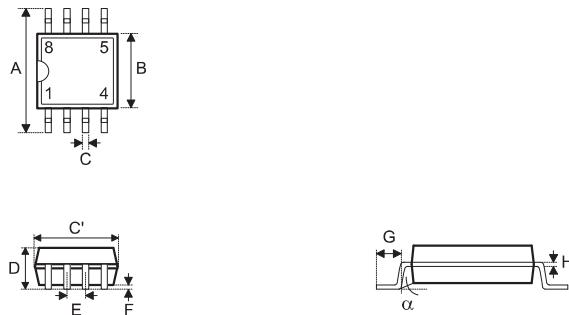
Note: Typical infrared diode: EL-1L2 (KODENSHI CORP.)

**HT6221B Application Circuit**

Note: Typical infrared diode: EL-1L2 (KODENSHI CORP.)

**HT6220A/HT6221A/HT6221B/HT6222A****HT6222A Application Circuit**

Note: Typical infrared diode: EL-1L2 (KODENSHI CORP.)

**Package Information****8-pin SOP (150mil) Outline Dimensions**

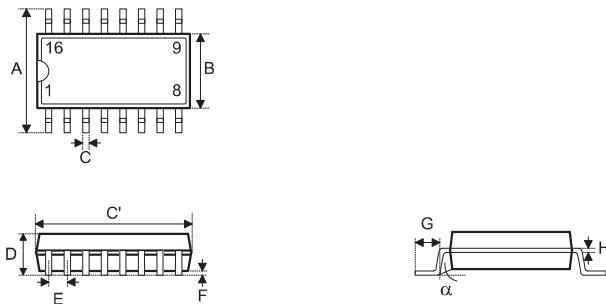
- MS-012

| Symbol | Dimensions in inch | | |
|----------|--------------------|-------|-------|
| | Min. | Nom. | Max. |
| A | 0.228 | — | 0.244 |
| B | 0.150 | — | 0.157 |
| C | 0.012 | — | 0.020 |
| C' | 0.188 | — | 0.197 |
| D | — | — | 0.069 |
| E | — | 0.050 | — |
| F | 0.004 | — | 0.010 |
| G | 0.016 | — | 0.050 |
| H | 0.007 | — | 0.010 |
| α | 0° | — | 8° |

| Symbol | Dimensions in mm | | |
|----------|------------------|------|------|
| | Min. | Nom. | Max. |
| A | 5.79 | — | 6.20 |
| B | 3.81 | — | 3.99 |
| C | 0.30 | — | 0.51 |
| C' | 4.78 | — | 5.00 |
| D | — | — | 1.75 |
| E | — | 1.27 | — |
| F | 0.10 | — | 0.25 |
| G | 0.41 | — | 1.27 |
| H | 0.18 | — | 0.25 |
| α | 0° | — | 8° |



16-pin NSOP (150mil) Outline Dimensions



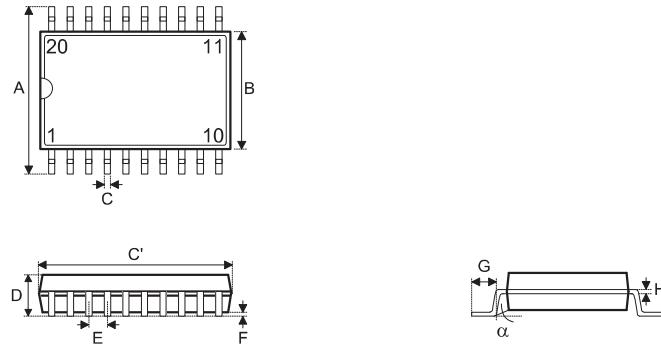
• MS-012

| Symbol | Dimensions in inch | | |
|----------|--------------------|-------|-------|
| | Min. | Nom. | Max. |
| A | 0.228 | — | 0.244 |
| B | 0.150 | — | 0.157 |
| C | 0.012 | — | 0.020 |
| C' | 0.386 | — | 0.402 |
| D | — | — | 0.069 |
| E | — | 0.050 | — |
| F | 0.004 | — | 0.010 |
| G | 0.016 | — | 0.050 |
| H | 0.007 | — | 0.010 |
| α | 0° | — | 8° |

| Symbol | Dimensions in mm | | |
|----------|------------------|------|-------|
| | Min. | Nom. | Max. |
| A | 5.79 | — | 6.20 |
| B | 3.81 | — | 3.99 |
| C | 0.30 | — | 0.51 |
| C' | 9.80 | — | 10.21 |
| D | — | — | 1.75 |
| E | — | 1.27 | — |
| F | 0.10 | — | 0.25 |
| G | 0.41 | — | 1.27 |
| H | 0.18 | — | 0.25 |
| α | 0° | — | 8° |

**HT6220A/HT6221A/HT6221B/HT6222A**

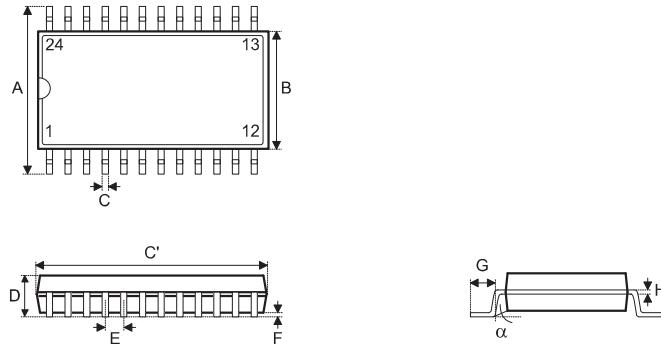
20-pin SOP (300mil) Outline Dimensions



- MS-013

| Symbol | Dimensions in inch | | |
|--------|--------------------|-------|-------|
| | Min. | Nom. | Max. |
| A | 0.393 | — | 0.419 |
| B | 0.256 | — | 0.300 |
| C | 0.012 | — | 0.020 |
| C' | 0.496 | — | 0.512 |
| D | — | — | 0.104 |
| E | — | 0.050 | — |
| F | 0.004 | — | 0.012 |
| G | 0.016 | — | 0.050 |
| H | 0.008 | — | 0.013 |
| α | 0° | — | 8° |

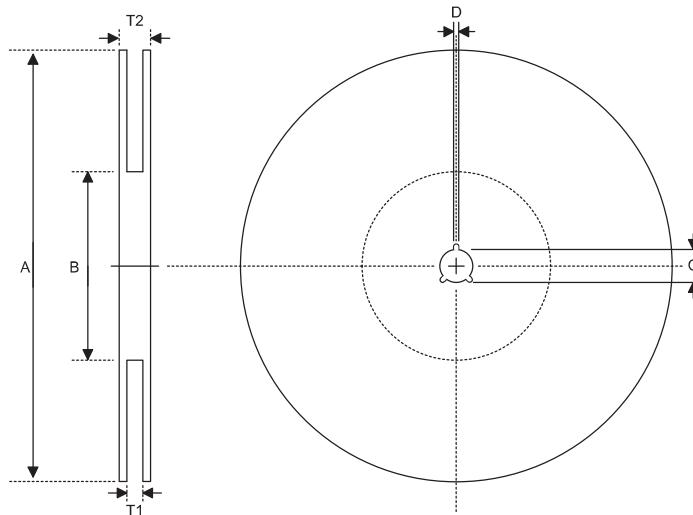
| Symbol | Dimensions in mm | | |
|--------|------------------|------|-------|
| | Min. | Nom. | Max. |
| A | 9.98 | — | 10.64 |
| B | 6.50 | — | 7.62 |
| C | 0.30 | — | 0.51 |
| C' | 12.60 | — | 13.00 |
| D | — | — | 2.64 |
| E | — | 1.27 | — |
| F | 0.10 | — | 0.30 |
| G | 0.41 | — | 1.27 |
| H | 0.20 | — | 0.33 |
| α | 0° | — | 8° |

**24-pin SOP (300mil) Outline Dimensions**

• MS-013

| Symbol | Dimensions in inch | | |
|----------|--------------------|-------|-------|
| | Min. | Nom. | Max. |
| A | 0.393 | — | 0.419 |
| B | 0.256 | — | 0.300 |
| C | 0.012 | — | 0.020 |
| C' | 0.598 | — | 0.613 |
| D | — | — | 0.104 |
| E | — | 0.050 | — |
| F | 0.004 | — | 0.012 |
| G | 0.016 | — | 0.050 |
| H | 0.008 | — | 0.013 |
| α | 0° | — | 8° |

| Symbol | Dimensions in mm | | |
|----------|------------------|------|-------|
| | Min. | Nom. | Max. |
| A | 9.98 | — | 10.64 |
| B | 6.50 | — | 7.62 |
| C | 0.30 | — | 0.51 |
| C' | 15.19 | — | 15.57 |
| D | — | — | 2.64 |
| E | — | 1.27 | — |
| F | 0.10 | — | 0.30 |
| G | 0.41 | — | 1.27 |
| H | 0.20 | — | 0.33 |
| α | 0° | — | 8° |

**Product Tape and Reel Specifications****Reel Dimensions**

SOP 8N

| Symbol | Description | Dimensions in mm |
|--------|-----------------------|---------------------------|
| A | Reel Outer Diameter | 330.0±1.0 |
| B | Reel Inner Diameter | 100.0±1.5 |
| C | Spindle Hole Diameter | 13.0 ^{+0.5/-0.2} |
| D | Key Slit Width | 2.0±0.5 |
| T1 | Space Between Flange | 12.8 ^{+0.3/-0.2} |
| T2 | Reel Thickness | 18.2±0.2 |

SOP 16N (150mil)

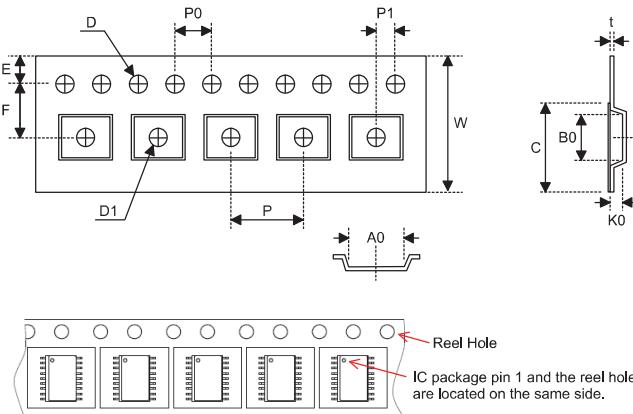
| Symbol | Description | Dimensions in mm |
|--------|-----------------------|---------------------------|
| A | Reel Outer Diameter | 330.0±1.0 |
| B | Reel Inner Diameter | 100.0±1.5 |
| C | Spindle Hole Diameter | 13.0 ^{+0.5/-0.2} |
| D | Key Slit Width | 2.0±0.5 |
| T1 | Space Between Flange | 16.8 ^{+0.3/-0.2} |
| T2 | Reel Thickness | 22.2±0.2 |

SOP 20W, SOP 24W

| Symbol | Description | Dimensions in mm |
|--------|-----------------------|---------------------------|
| A | Reel Outer Diameter | 330.0±1.0 |
| B | Reel Inner Diameter | 100.0±1.5 |
| C | Spindle Hole Diameter | 13.0 ^{+0.5/-0.2} |
| D | Key Slit Width | 2.0±0.5 |
| T1 | Space Between Flange | 24.8 ^{+0.3/-0.2} |
| T2 | Reel Thickness | 30.2±0.2 |



Carrier Tape Dimensions



SOP 8N

| Symbol | Description | Dimensions in mm |
|--------|--|-----------------------|
| W | Carrier Tape Width | $12.0 \pm 0.3/-0.1$ |
| P | Cavity Pitch | 8.0 ± 0.1 |
| E | Perforation Position | 1.75 ± 0.1 |
| F | Cavity to Perforation (Width Direction) | 5.5 ± 0.1 |
| D | Perforation Diameter | 1.55 ± 0.1 |
| D_1 | Cavity Hole Diameter | $1.50 \pm 0.25/-0.00$ |
| P_0 | Perforation Pitch | 4.0 ± 0.1 |
| P_1 | Cavity to Perforation (Length Direction) | 2.0 ± 0.1 |
| A_0 | Cavity Length | 6.4 ± 0.1 |
| B_0 | Cavity Width | 5.2 ± 0.1 |
| K_0 | Cavity Depth | 2.1 ± 0.1 |
| t | Carrier Tape Thickness | 0.30 ± 0.05 |
| C | Cover Tape Width | 9.3 ± 0.1 |

SOP 16N (150mil)

| Symbol | Description | Dimensions in mm |
|--------|--|-----------------------|
| W | Carrier Tape Width | 16.0 ± 0.3 |
| P | Cavity Pitch | 8.0 ± 0.1 |
| E | Perforation Position | 1.75 ± 0.1 |
| F | Cavity to Perforation (Width Direction) | 7.5 ± 0.1 |
| D | Perforation Diameter | $1.55 \pm 0.10/-0.00$ |
| D_1 | Cavity Hole Diameter | $1.50 \pm 0.25/-0.00$ |
| P_0 | Perforation Pitch | 4.0 ± 0.1 |
| P_1 | Cavity to Perforation (Length Direction) | 2.0 ± 0.1 |
| A_0 | Cavity Length | 6.5 ± 0.1 |
| B_0 | Cavity Width | 10.3 ± 0.1 |
| K_0 | Cavity Depth | 2.1 ± 0.1 |
| t | Carrier Tape Thickness | 0.30 ± 0.05 |
| C | Cover Tape Width | 13.3 ± 0.1 |

**HT6220A/HT6221A/HT6221B/HT6222A**

SOP 20W

| Symbol | Description | Dimensions in mm |
|--------|--|-----------------------------|
| W | Carrier Tape Width | 24.0 ^{+0.3/-0.1} |
| P | Cavity Pitch | 12.0±0.1 |
| E | Perforation Position | 1.75±0.10 |
| F | Cavity to Perforation (Width Direction) | 11.5±0.1 |
| D | Perforation Diameter | 1.5 ^{+0.1/-0.0} |
| D1 | Cavity Hole Diameter | 1.50 ^{+0.25/-0.00} |
| P0 | Perforation Pitch | 4.0±0.1 |
| P1 | Cavity to Perforation (Length Direction) | 2.0±0.1 |
| A0 | Cavity Length | 10.8±0.1 |
| B0 | Cavity Width | 13.3±0.1 |
| K0 | Cavity Depth | 3.2±0.1 |
| t | Carrier Tape Thickness | 0.30±0.05 |
| C | Cover Tape Width | 21.3±0.1 |

SOP 24W

| Symbol | Description | Dimensions in mm |
|--------|--|-----------------------------|
| W | Carrier Tape Width | 24.0±0.3 |
| P | Cavity Pitch | 12.0±0.1 |
| E | Perforation Position | 1.75±0.1 |
| F | Cavity to Perforation (Width Direction) | 11.5±0.1 |
| D | Perforation Diameter | 1.55 ^{+0.10/-0.00} |
| D1 | Cavity Hole Diameter | 1.50 ^{+0.25/-0.00} |
| P0 | Perforation Pitch | 4.0±0.1 |
| P1 | Cavity to Perforation (Length Direction) | 2.0±0.1 |
| A0 | Cavity Length | 10.9±0.1 |
| B0 | Cavity Width | 15.9±0.1 |
| K0 | Cavity Depth | 3.1±0.1 |
| t | Carrier Tape Thickness | 0.35±0.05 |
| C | Cover Tape Width | 21.3±0.1 |



Copyright © 2010 by HOLTEK SEMICONDUCTOR INC.

The information appearing in this Data Sheet is believed to be accurate at the time of publication. However, Holtek assumes no responsibility arising from the use of the specifications described. The applications mentioned herein are used solely for the purpose of illustration and Holtek makes no warranty or representation that such applications will be suitable without further modification, nor recommends the use of its products for application that may present a risk to human life due to malfunction or otherwise. Holtek's products are not authorized for use as critical components in life support devices or systems. Holtek reserves the right to alter its products without prior notification. For the most up-to-date information, please visit our web site at <http://www.holtek.com.tw>.