

**SPECIFICATION**

Current Rating:1.0A Max.
 Voltage Rating:30V Max.
 Withstanding Voltage:100V AC
 Contact Resistance:50 Milliohms Max.
 Insulation Resistance:100 Megaohms Min.
 Temperature Range:-55°C~+85°C
 Mating Force:35N Max.
 Withdrawal Force:7N Min.
 Durability:5000 Cycles,0.3 Kg Min.
 Contacts:Phosphor Bronze
 Gold Flash On Contact Area,
 Tin Plated On Solder Tails,Over Nickel
 Insulator:LCP+30%G.F.(UL94V-0),Black
 Shell:Phosphor Bronze,Nickel Plated Over All
 RoHS Compliant

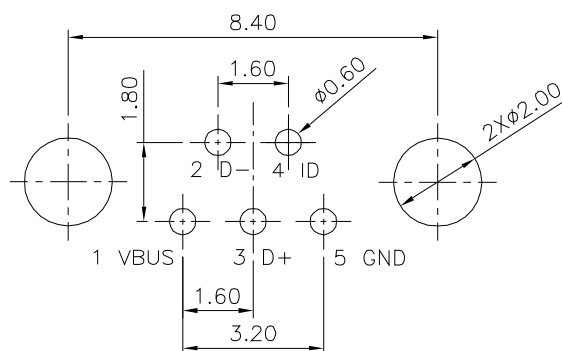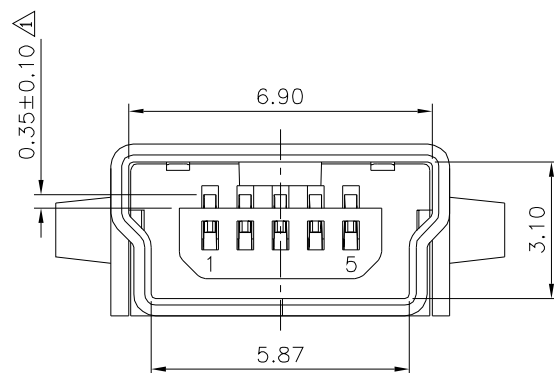

Recommended P.C.B. Layout
 (Thickness=1.00mm)

Pin	Function
1	VBUS
2	D-
3	D+
4	ID
5	GND

Mini USB 5 Pin Vertical Curved Mounting
<https://www.sunrom.com/m/7265>

DRAWING No.

7265

APPROVED BY ME

CHECKED BY HZ

DRAWING BY YB

SCALE

NONE

REV.

B1

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

.X ±0.38 .X* ±1.0*

.XX ±0.25 .XX* ±0.5*

.XXX ±0.15 .XXX* ±0.2*

UNIT

mm



NO.	REV.	REVISIONS	CH	DATE
1	B1	Modify Data	HZ	11/18/2024
2	B0	Modify Data	HZ	09/15/2013
3	B0	NEW RELEASE	HZ	09/15/2013