
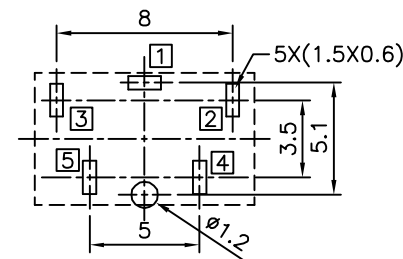
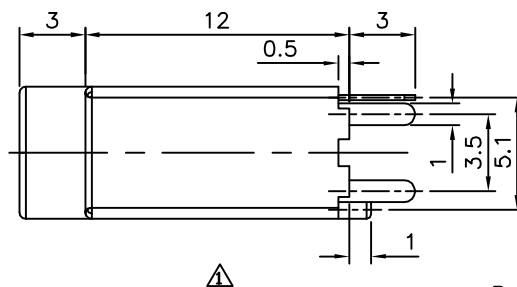





2.1 SPECIFICATION

Rating:DC 30V,0.5A
Contact Resistance:50 Milliohms Max.
After Test:100 Milliohms Max.
Insulation Resistance:100 Megaohms Min. At 500V DC
After Test:50 Megaohms Min.
Withstand Voltage:500V AC
Insertion And Extraction Force:3~30N
Life Test:5000 Cycles Min.
Operation Temperature Range:-20°C~+70°C
Preservative Temperature Range:-40°C~+85°C
RoHS Compliant




Recommended P.C.B. Layout(Bottom Side) 

Unspecified Tolerance ± 0.05

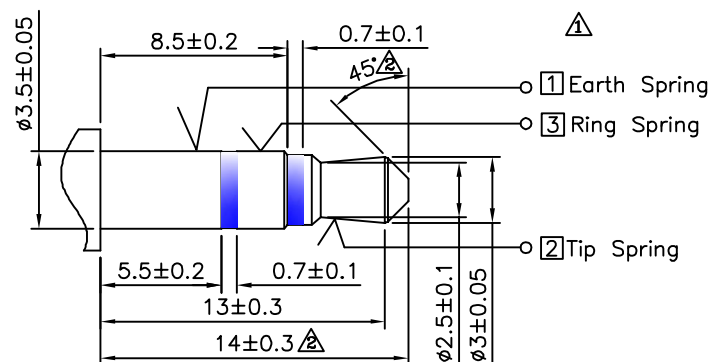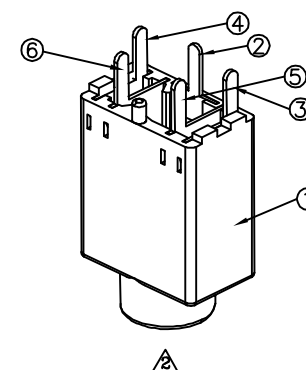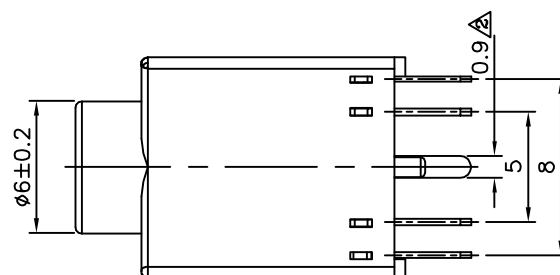

1 Matching Plug



⚠	⑥	Shunt Terminal	5	1	Brass	Silver Plated
	⑤	Shunt Terminal	4	1	Brass	Silver Plated
	④	Ring Spring	3	1	Stainless Steel	Silver Plated
	③	Tip Spring	2	1	Phosphor Bronze	Silver Plated
	②	Earth Spring	1	1	Stainless Steel	Silver Plated
	①	Housing		1	PBT,UL94V-0	Black
⚠	No.	Description	Q'ty		Material	Finish

Stereo Audio Socket 5P Vertical

Green	https://www.sunrom.com/m/7484
Pink	https://www.sunrom.com/m/7485
Black	https://www.sunrom.com/m/7486

DRAWING No.

7484

SCALE	NONE
-------	------

NONE

APPROVED BY

ME

CHECKED BY

HZ


DRAWING BY

GA

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

$\triangle 1$	X.	± 0.3
	.X	± 0.3
	ANG.	$\pm 2^\circ$

	UNIT mm
--	------------



	AU
NO	REV

Key Data

REVISIONS

HZ	07/21/2
CHK	DATE

14