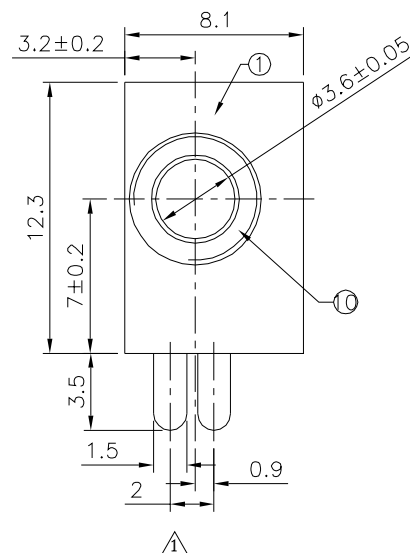
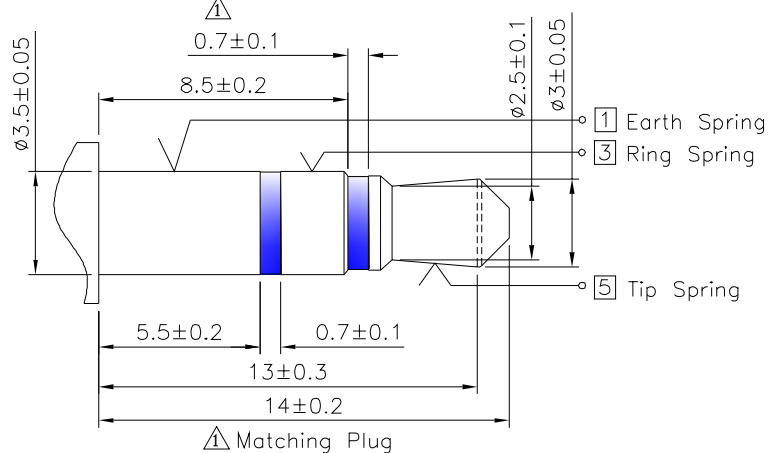
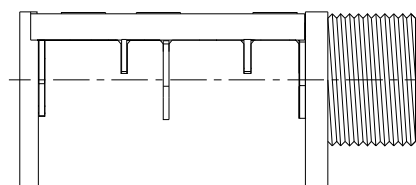
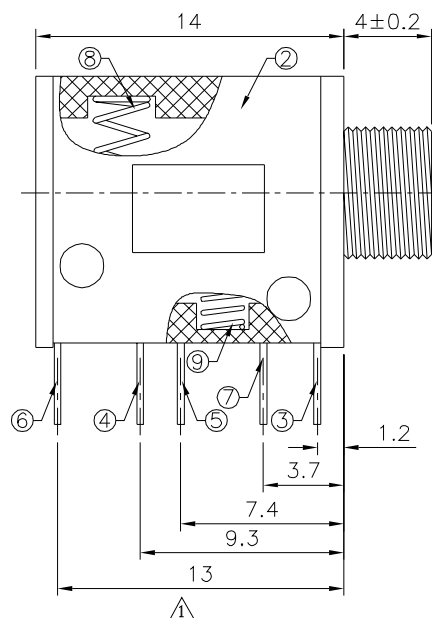
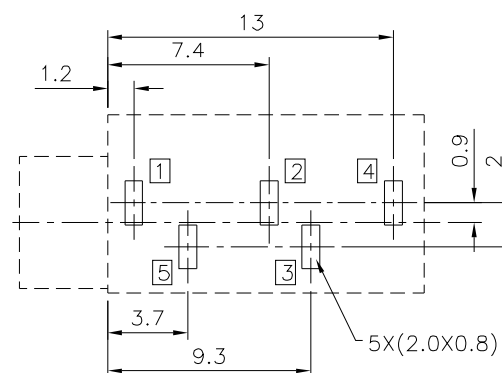



**△ SPECIFICATION**

Rating: DC 30V, 0.5A
Contact Resistance: 30 Milliohms Max.
After Test: 50 Milliohms Max.
Insulation Resistance: 100 Megaohms Min. (500V DC)
After Test: 50 Megaohms Min.
Withstand Voltage: 500V AC
Insertion And Extraction Force: 3~30N
Life Test: 5000 Cycles Min.
Operation Temperature Range: -20°C ~ +70°C
△ Storage Temperature: -40°C ~ +85°C
RoHS Compliant

Stereo Audio Socket 5P**TOP VIEW** P.C.B. Layout

△ No.	Description	Q'ty	Material	Remark
-------	-------------	------	----------	--------

⑨	Spring-2	1	Spring Wire	Nickel Plated
⑧	Spring-1	1	Spring Wire	Nickel Plated
⑦	Tip Spring	5	Phosphor Bronze	Tin Plated
⑥	Shunt Terminal	4	Brass	Tin Plated
⑤	Shunt Terminal	2	Brass	Tin Plated
④	Ring Spring	3	Phosphor Bronze	Silver Plated
③	Earth Terminal	1	Brass	Tin Plated
②	Cover	1	PBT	Black
①	Housing	1	PBT	Black

Black <https://www.sunrom.com/m/7479>
Pink <https://www.sunrom.com/m/7480>
Blue <https://www.sunrom.com/m/7481>
Green <https://www.sunrom.com/m/7482>
Yellow <https://www.sunrom.com/m/7483>

DRAWING No. △

7479

APPROVED BY

ME

CHECKED BY

HZ

DRAWING BY

CY

SCALE

NONE

REV.

A2

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

△ X. ±0.3

.X ±0.3

ANG. ±2°

UNIT

mm



△ A2

Modify Data

HZ

07/23/2019

△ A1

Modify Data

HZ

12/06/2013

△ A0

NEW RELEASE

BEC

12/08/2005

NO. REV.

REVISIONS

CHK

DATE