


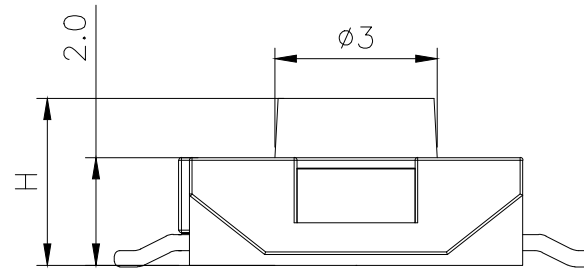
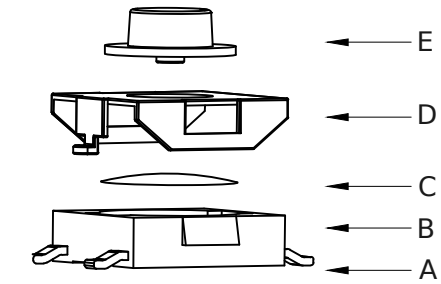
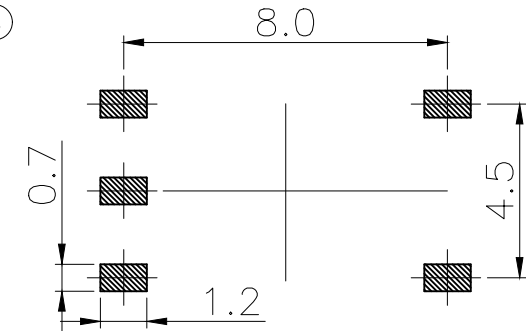


RoHS

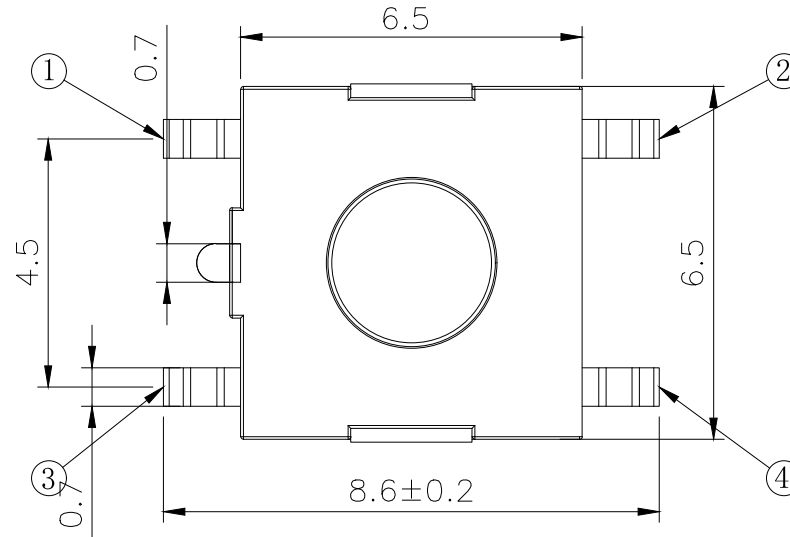

CIRCUIT DIAGRAM



PCB. WELDING DRAWING

Specification

Operating Life	100,000
Contact rating	50mA@12V DC.
Insulation resistance	1011 Ω min.
Contact resistance	100mΩ max. initial.
Dielectric Strength	250 V AC(1mm)
Travel	0.25±0.15mm
Storage Temperature	- 30° C to 80° C

ITEM	DESCRIPTION	MATERIAL	QTY	FINISH/COLOR
E	Button	PPA	1	Pickling
D	COVER	Stainless Steel	1	Cleaning
C	DOME	Stainless Steel	1	Plated Ag
B	HOUSING	PPA	1	Black
A	PIN	PHOSPHOR BRONZE	1	Plated Ag

Tactile Switch SMD Red 6.5x6.5mm

Height in mm

2.5 <https://www.sunrom.com/m/7596>

2.7 <https://www.sunrom.com/m/7597>

3.1 <https://www.sunrom.com/m/7598>

3.4 <https://www.sunrom.com/m/7599>

3.7 <https://www.sunrom.com/m/7600>