




Slide Switch TH Vertical - 3 pins - 1 circuits - 2 positions
<https://www.sunrom.com/m/7506>

Electrical Properties	Contact Rating	0.5A, 24V DC	
	Initial Contact Resistance	50mΩ max.	
	Insulation Resistance	100MΩ min.500V DC	Skey/PD: 100MΩ min.300V DC
	Withstand Voltage	300V AC for 1 minute	250 V AC for 1 minut
Durable Performance	There No Load	15,000 Cycles	10,000 Cycles
	Rated Load	12,000 Cycles	8,500 Cycles
Storage temp.		-35℃~+75℃(Operating Temp:)	
Operating Force		3. 5N. (1N. =100gram-force)	
Heat Rrsistance		IR Reflow:255℃, 5sec. Manual :350℃, 3sec.	

CIRCUIT DIAGRAM



Unit:mm

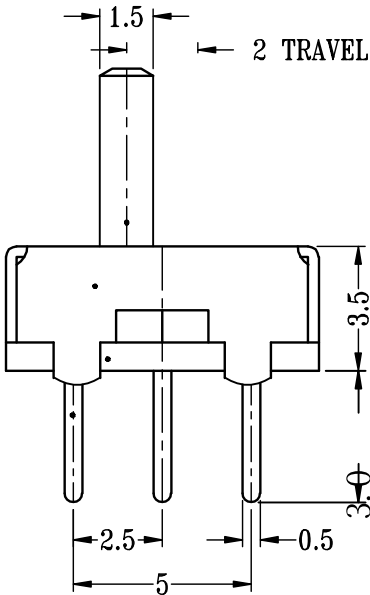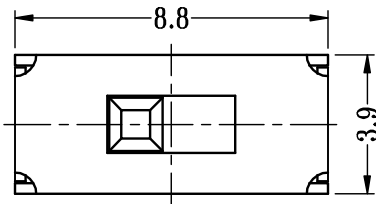

P.C.B LAYOUT

