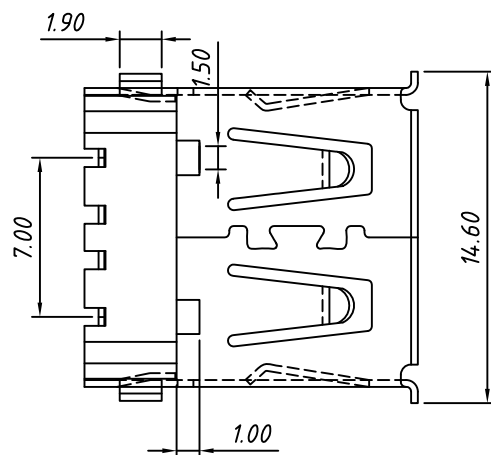

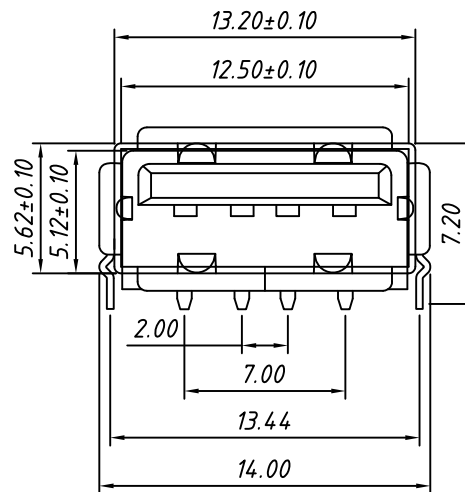
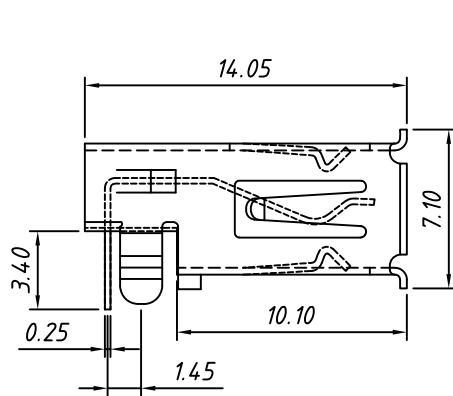


RECOMMENDED PCB LAYOUT
TOLERANCE:±0.05

Material

Housing: Thermoplastic plastics.

Terminals: Copper Alloy. Gold plated in contact area;

Tin plated in termination Nickel plated overall.

Shell: Copper Alloy. Nickel plated overall.

Electrical:

Rating Current: 1.5 Ampere.

Rating Voltage: 30V Max.

Contact Resistance: 30mΩ Mill.

Insulation Resistance: 1000MΩ Min.

Mechanical Characteristics:

Connector Mating force: 35N Max (3.57Kgf)

Connector Unmating force: 10N Min (1.02Kgf)

Durability: 1500 Cycles.

Environment Characteristics:

Operating temperature: -0 °C to +50 °C

USB A-type Right Angle Male PCB Slot **Flat** Entry

Product Code 7267

<https://www.sunrom.com/m/7267>

USB A-type Right Angle Male PCB Slot **Bent** Entry

Product Code 7266

<https://www.sunrom.com/m/7266>