



ROHS

TYPE-C-16P

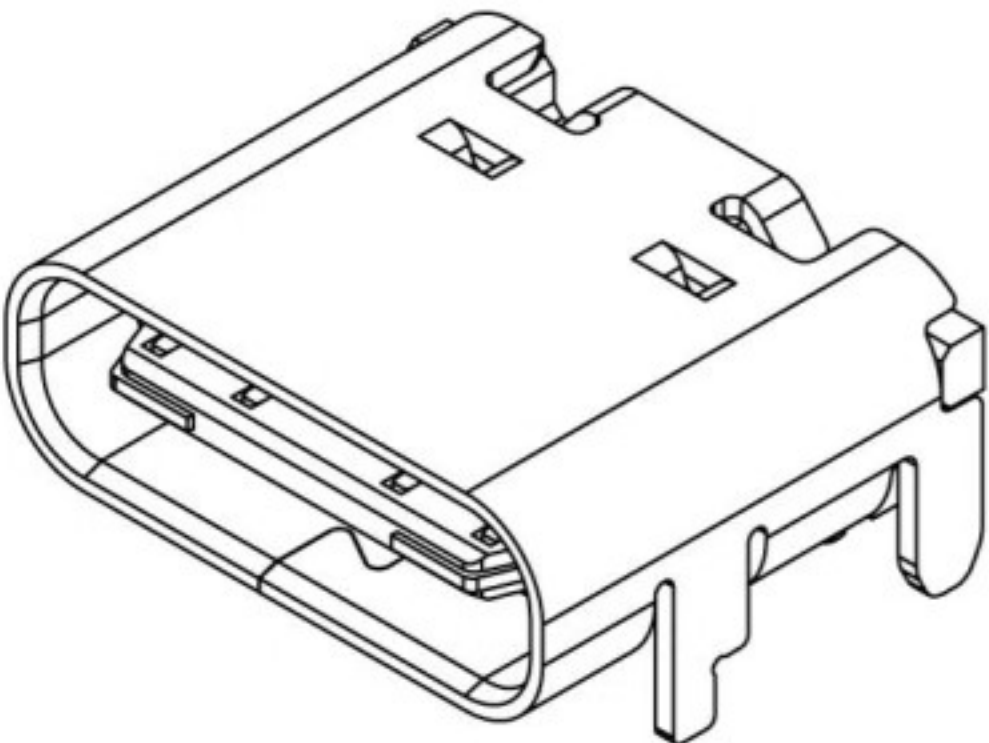

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

- Specification:
- 1.Electrical Characteristics:
Contact Current Rating: 3 Amperes Max.
Rated Voltage: 30V Max.
Dielectric Withstanding Voltage: AC 100V r.m.s.
Insulation Resistance: 100 MΩ Minimum.
Contact Resistance: 40 mΩ Maximum.
 - 2.Environmental:
Operating Temperature: -40°C~+85°C.
 - 3.Mechanical Characteristics:
Insertion Force: 5~20Nf.
Withdrawal Force: 6~20Nf.
Durability Cycles: 10000 Cycles.
 - 4. **XX** Make is FAI test Dimension
▼ Make is major test Dimension

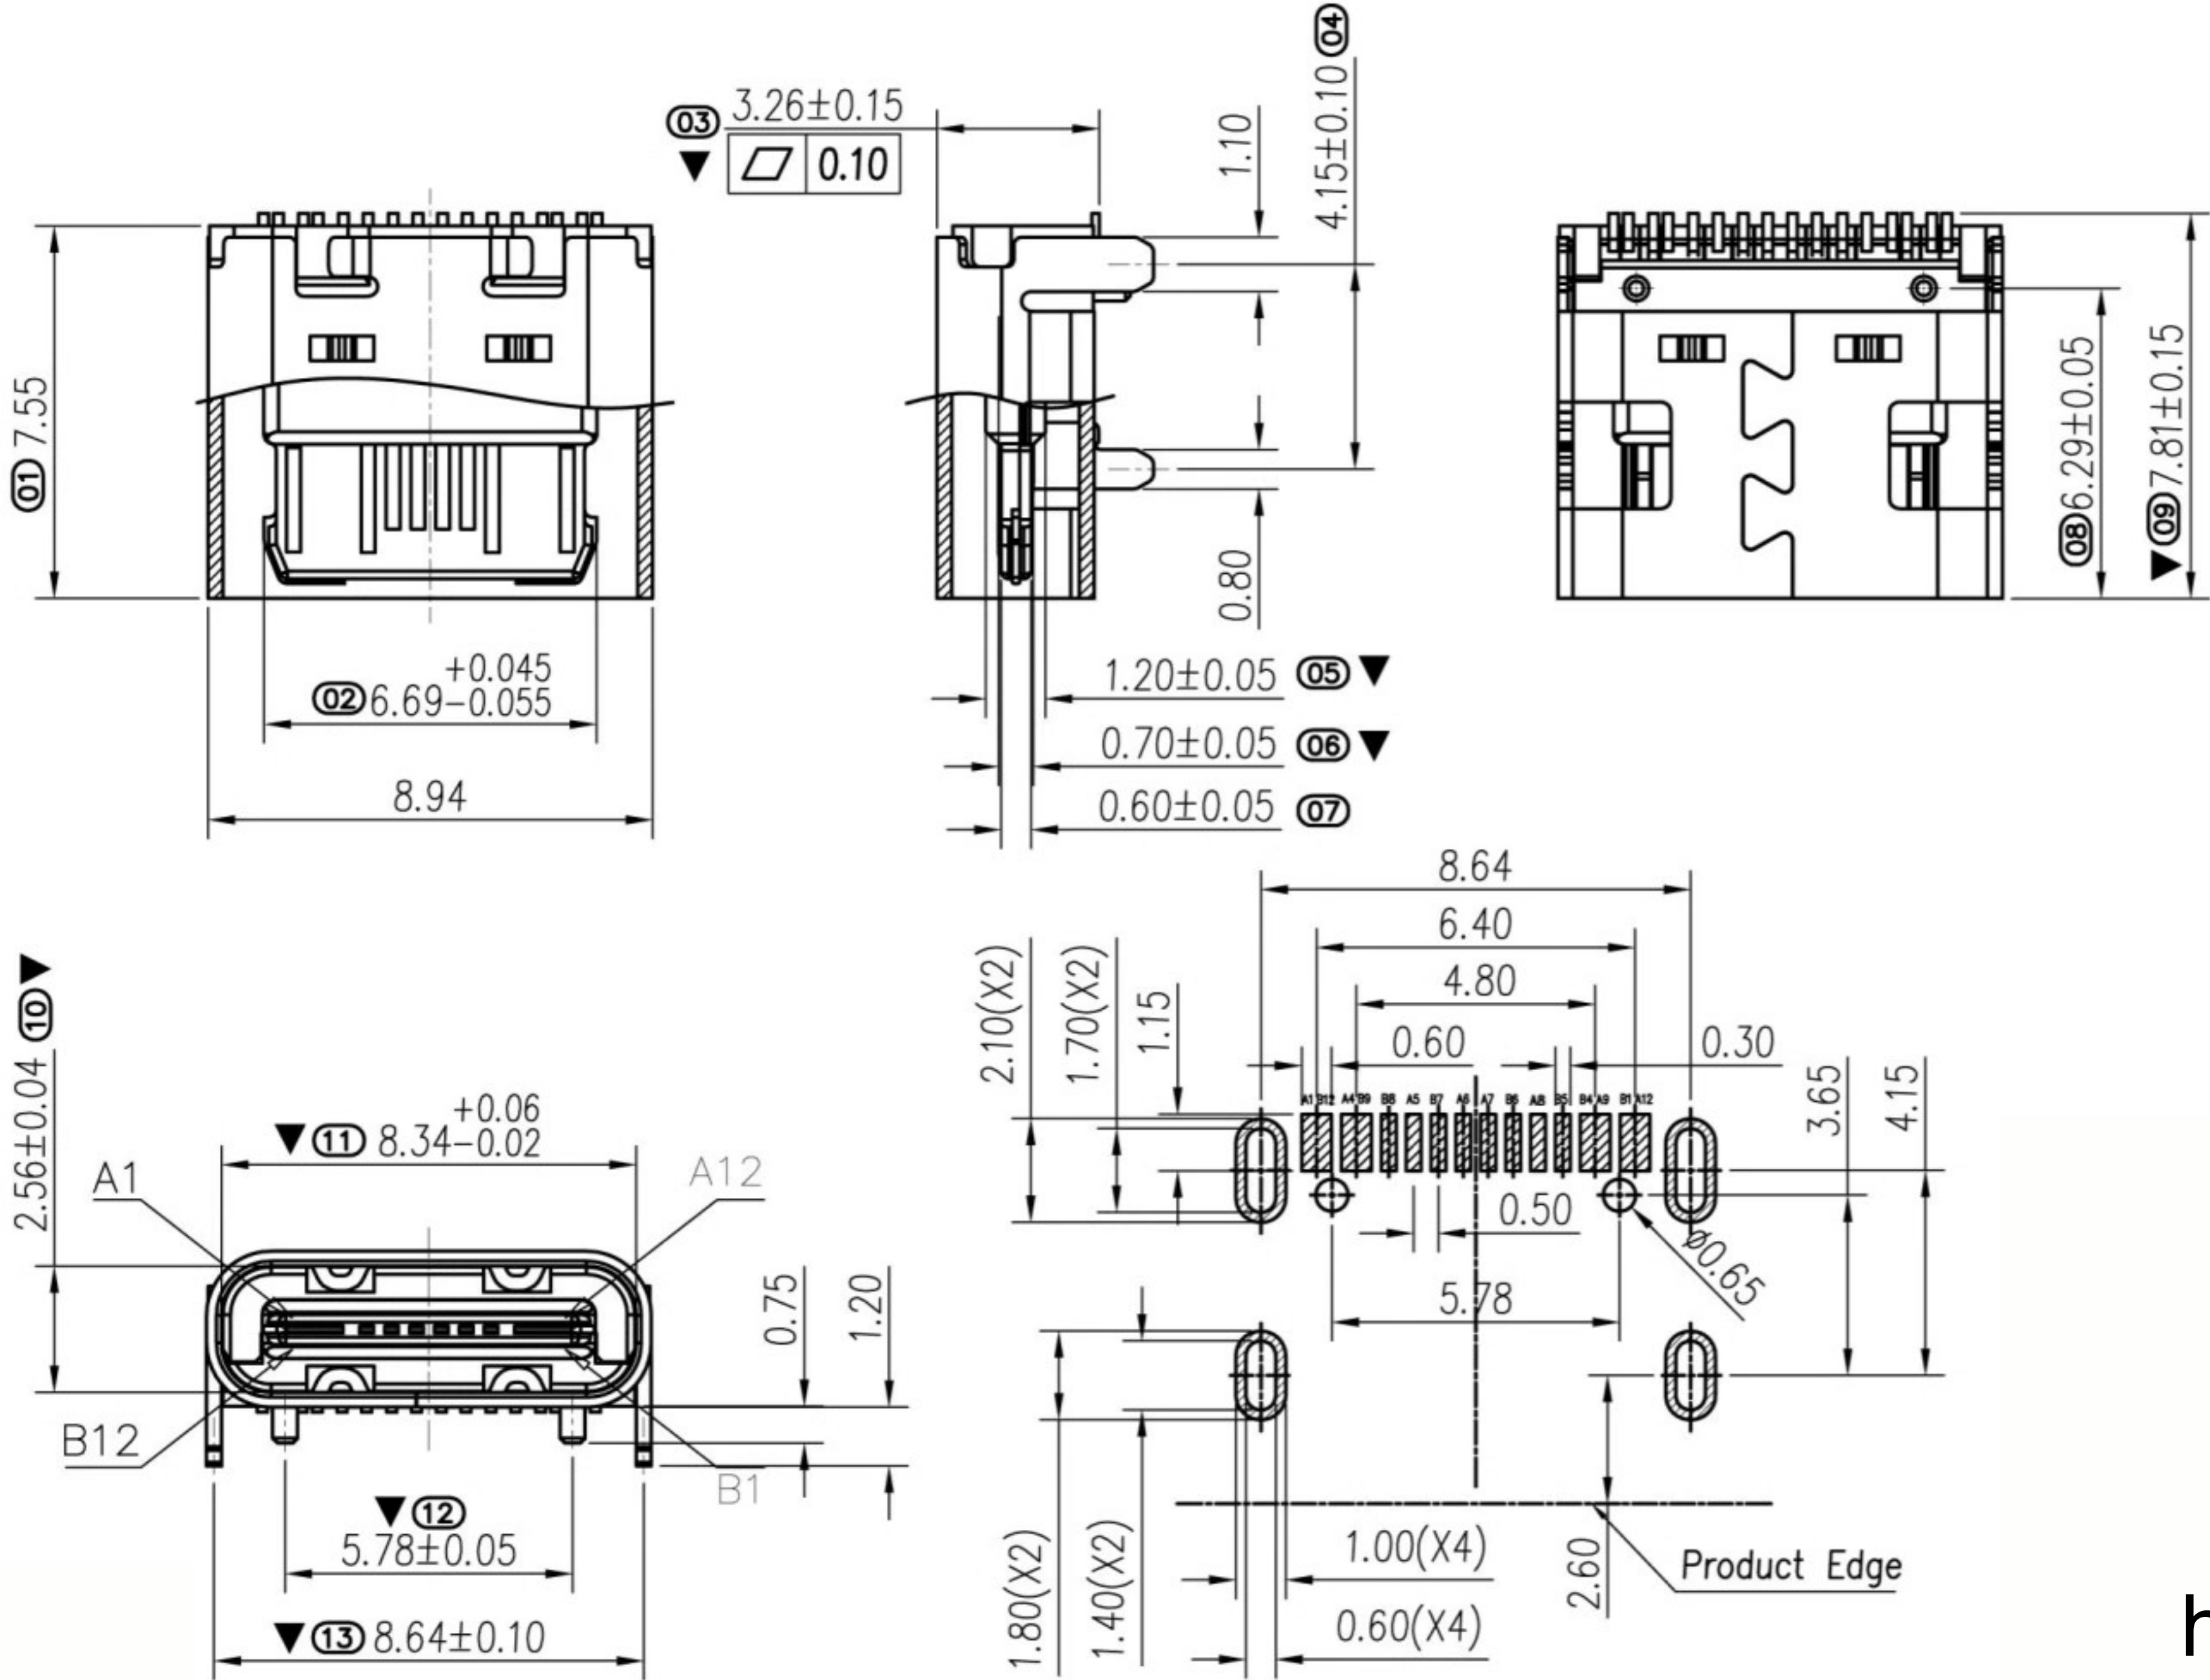

NO.	NAME	DESCRIPTION
3	CONTACT	COPPER ALLOY
2	INSULATOR	HIGH TEMPERATURE PLASTIC UL 94 V-0
1	SHELL	Stainless Steel

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

USB Type-C 16P SMD
Product Code 7263
<https://www.sunrom.com/m/7263>