

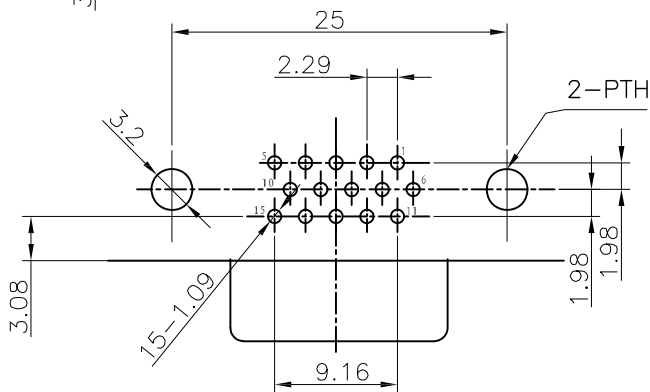
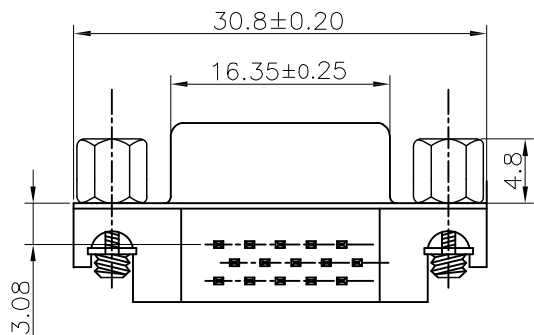
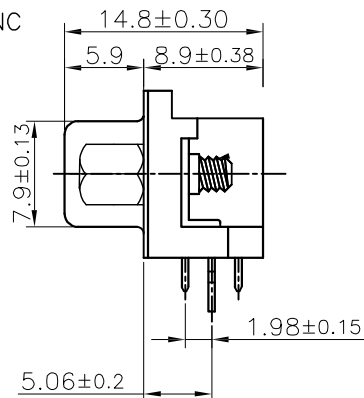


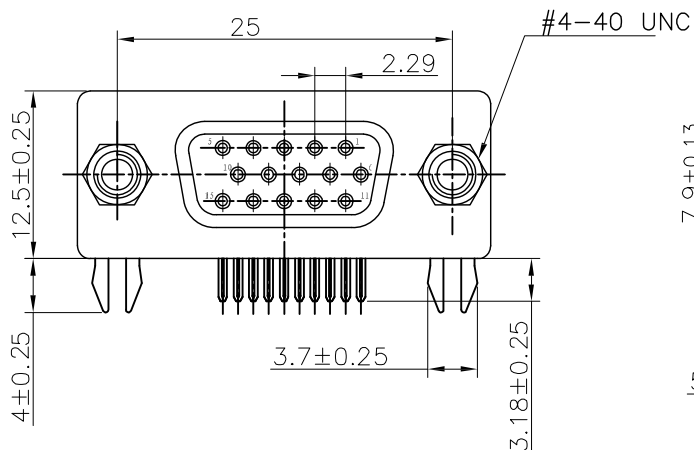

PCB Holes Diagram(Top View)



4.75*4.80*11.80

NOTES:

*HOUSING:PBT+30%G/F color: Blue

*CONTACT:BRASS T=0.3

*SHELL: SPCC T=0.3

*SCREW:SPCC

*GROUNDING:SPCC T=0.5

*ELECTRIC CHARACTERISTICS:

CONTACT CURRENT RATING: 3.0A MAX.;

CONTACT VOLTAGE RATING:100V DC;

CONTACT RESISTANCE: 30mΩ MAX.;

DIELECTRIC WITHSTANDING VOLTAGE:500V AC/60S;

INSULATION RESISTANCE: 1000 MΩ MIN.AT DC 500V.

*MECHANICAL CHARACTERISTICS:

DURABILITY: 5000 CYCLES.

INSERTION AND EXTRACTION FORCE:

INSERTION FORCE: 50N MAX.

EXTRACTION FORCE: 15N MIN.

*ENVIRONMENT CHARACTERISTICS:

OPERATING TEMPERATURE: -25℃~+70℃

HUMIDITY:45-85% RH.

CONTACT:UNDER PLATED 50u" MIN Ni

OVER ALL 100u" MIN TIN IN SOLDERING AREA OR

CONTACT AREA

SHELL: UNDER PLATED 50u" MIN Cu.Over All 80u"

MIN NICKEL

SCREW: UNDER PLATED 50u" MIN Cu.OVER ALL

80u" MIN NICKEL

GROUNDING:UNDER PLATED 50u" MIN Cu.

UNDER PLATED 50u" MIN NICKEL. OVER ALL

100u" MIN TIN IN SOLDERING AREA.

VGA Connector DB15 D-SUB Female PCB Mount Right Angle

<https://www.sunrom.com/m/7237>

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X' ±2" X.X' ±0.5"	DRAWN BY : sunrom.com	DATE : 2013-09-20	PART NAME: 7237	
	CHECKED BY: sunrom.com	DATE : 2013-09-20	PART NO.	
 UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: sunrom.com	DATE : 2013-09-20	MOLD NO.	
			DRAW NO:	
			SHEET NO.	1 OF 1