
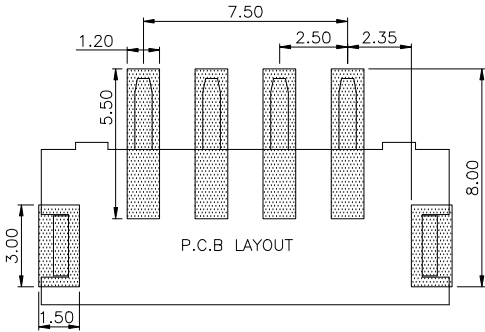
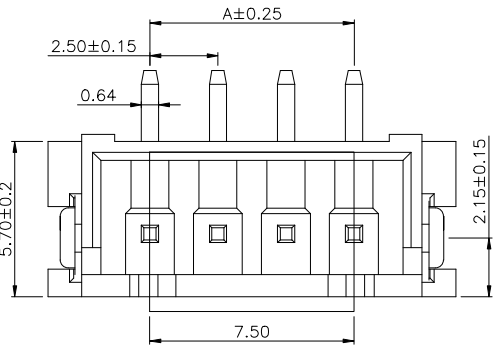


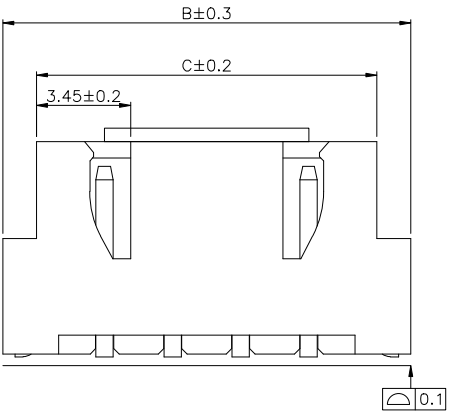
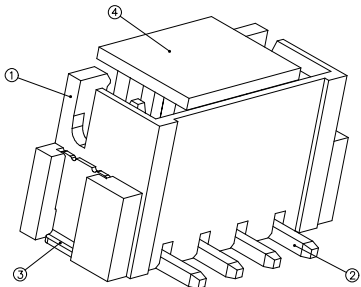




Part No	Pin	A	B	C
https://www.sunrom.com/m/5608	2	2.50	10.00	7.50
https://www.sunrom.com/m/5609	3	5.00	12.50	10.00
https://www.sunrom.com/m/5610	4	7.50	15.00	12.50
https://www.sunrom.com/m/5611	5	10.00	17.50	15.00
https://www.sunrom.com/m/5612	6	12.50	20.00	17.50
https://www.sunrom.com/m/5613	7	15.00	22.50	20.00
https://www.sunrom.com/m/5614	8	17.50	25.00	22.50
	9	20.00	27.50	25.00
	10	22.50	30.00	27.50
	11	25.00	32.50	30.00
	12	27.50	35.00	32.50
	13	30.00	37.50	35.00
	14	32.50	40.00	37.50
	15	35.00	42.50	40.00
	16	37.50	45.00	42.50

NOTES:
1.BASE: LCP
2.PIN: Brass
3.Solder Tab: Brass
SPECIFICATIONS:
1.Spacing: 2.5
2.Voltage Rating: 250V AC DC
3.Current Rating: 3A AC DC
4.Insulation Resistance: 800MΩ Min
5.Contact Resistance: 20mΩ Max
6.Withstanding voltage: 1000V AC 1/Minute
7.Temperatuer Range: -25℃ ~+ 85℃