

1

2

3

4

5

6

A

B

C





D

A

B

C

D

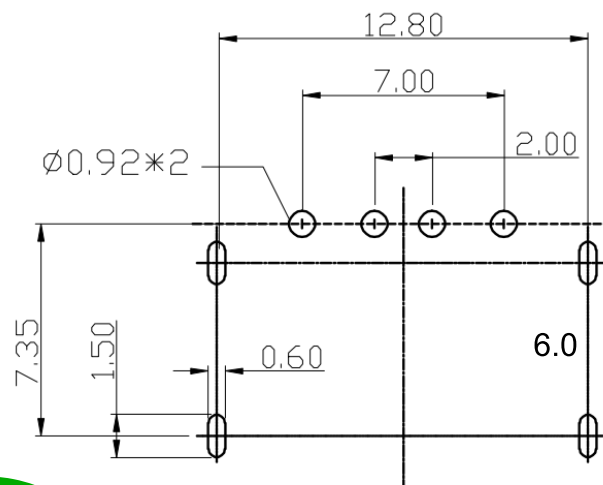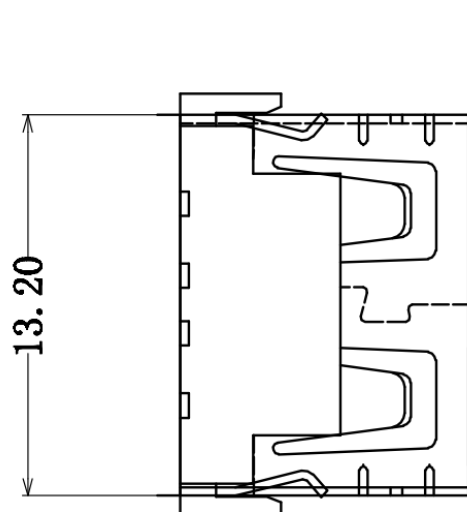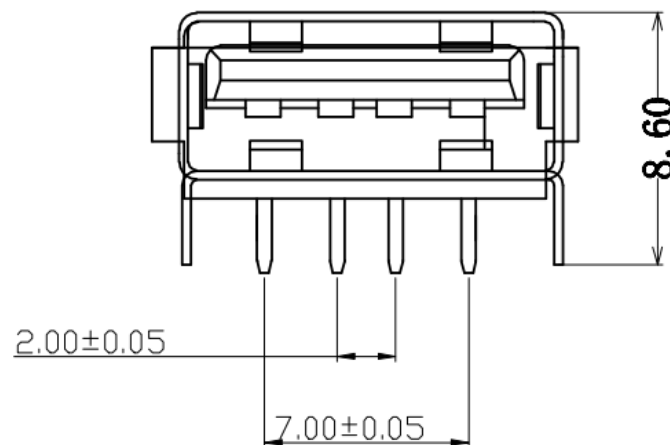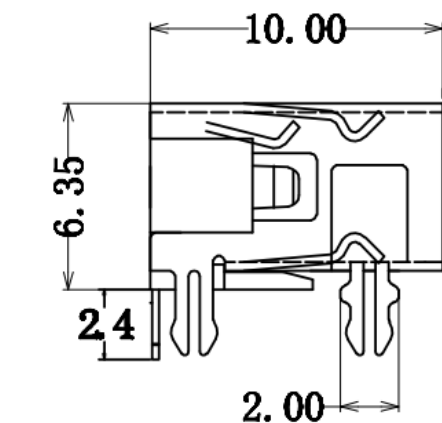

RECOMMENDED P.C.B LAYOUT



Specifications:

Electrical:

1. Contact Resistance:
30 milliohms MAX
2. Dielectric With Standing Voitage:
500 V AC AT Sea Levot
3. Insulation Resistance:
1000 MEGA ohms MIN

Mechanical:

1. Mating Force:
35 N MAX
2. Unmating Force:
8 N MIN

Matorial:

1. PBT.
2. Contact: C2680
3. Shell: SPCC

Finish:

1. Contact:Piated Gold in Mating AreaA:
Tin/Lead On Solder Talls.
2. Shell:Nickel Plating .

PRODUCT NAME

USB A-Type Female PCB R/A Short Body

SUNROM.COM

PRODUCT CODE

7186

PRODUCT URL

<https://www.sunrom.com/m/7186>

DATE

01/04/2025

1

2

5

6