


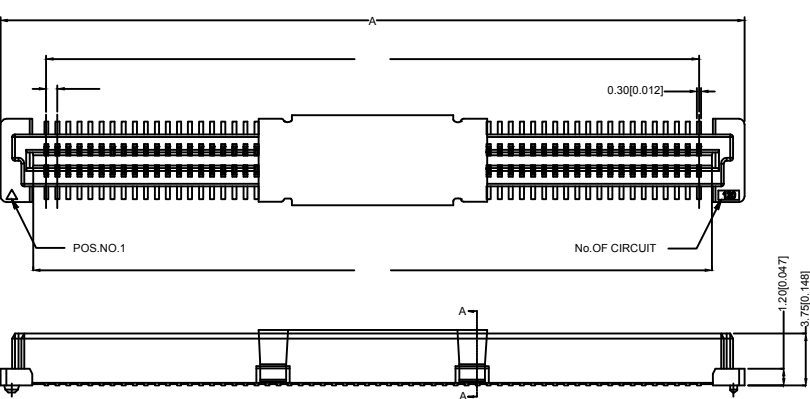
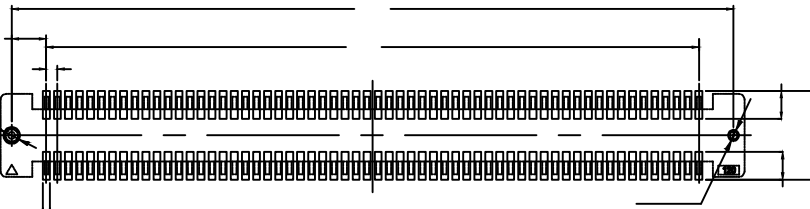


1 2 3 4 5 6



Voltage rating: 50V AC/DC
50V AC/DC
Current rating: 0.5A AC/DC
0.5A AC/DC
Withstanding voltage: 500V AC/minute
150V AC/
Temperature range: -25 +85
-25 +85

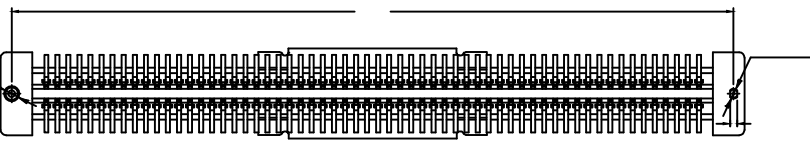

RECOMMENDED P.C. BOARD LAYOUT

NO. of contacts	Dimensions			
	A	B	C	D
40	21.80	15.20	17.10	20.20
60	29.80	23.20	25.10	28.20
80	37.80	31.20	33.10	36.20
100	45.80	39.20	41.10	44.20
120	53.80	47.20	49.10	52.20
140	61.80	55.20	57.10	60.20
160	69.80	63.20	65.10	68.20
180	77.80	71.20	73.10	76.20
200	85.80	79.20	81.10	84.20

1 2 3 4 5 6

PRODUCT NAME

B2B 0.8mm Female Board to Board Connector

PRODUCT URL

<https://www.sunrom.com/c/b2b-board-to-board>

DATE

07/05/2025

