

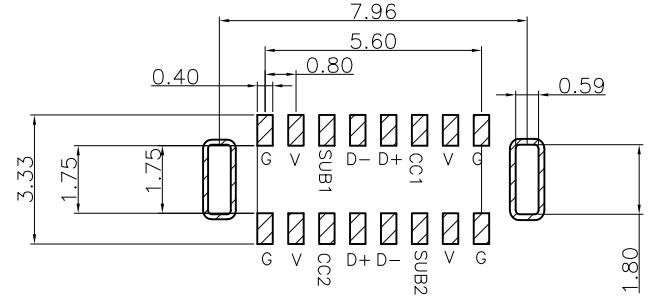
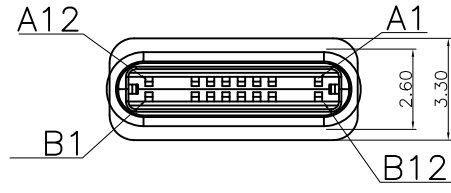



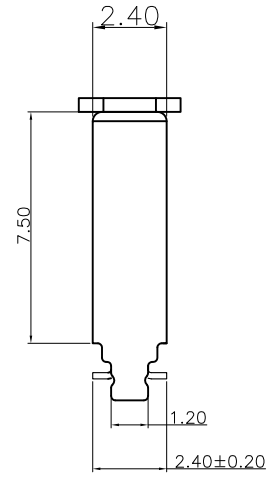

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED $\pm 0.05\text{mm}$

- 1.ELECTRICAL:
CURRENT:3A
CONTACT RESISTANCE:40 MILLIOHMS MAX
DIELECTRIC WITHSTANDING VOLTAGE: 200V AC
INSULATION RESISTANCE:100 MEGOHMS MIN
- 2.MECHANICAL:
MATING FORCE:5-20N
WITHDRAWAL FORCE:5-20N
DURBILITY:10000 CYCLES
- 3.ENVIRONMENTAL:
TEMPERTURE RANGE $-40^{\circ}\text{C}\sim 105^{\circ}\text{C}$
SALT TESTING:48 HOURS

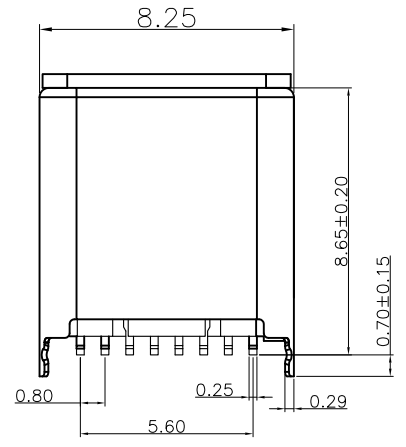

4	PLASTIC	LCP	BLACK	UL 94V-0
3	Latch	SUS301	—	NI Plated
2	TERMINAL	C5191-H	—	Gold Plated
1	SHELL	SUS201	—	Ni Plated
NO.	DESCRIPTION	MATERIAL	COLOR	REMARK

PRODUCT NAME		SUNROM.COM	
USB Type-C Male 16 pin Vertical Connector			
PRODUCT CODE	PRODUCT URL		DATE
7908	https://www.sunrom.com/m/7908		15/06/2025