

1

2


3

4

5

6

A

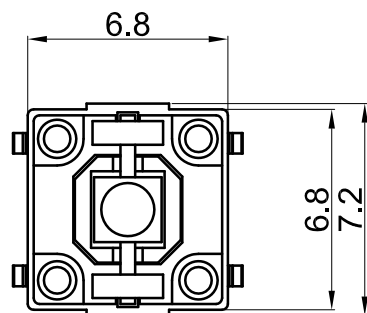**MATERIAL:**



Base Frame:Nylon46,UL rated:94V-2 Min. ;
 Top Cover:PET,UL rated:94V-2 Min. ;
 Actuator: Nylon66, UL rated:94V-2 Min. ;
 Terminal:Brass with Silver-plate.

**Specifications**

Circuit	:SPST
Current rating	:50mA
Voltage rating	:12VDC
Dielectric withstanding voltage	:250VAC for 1 minute
Contact resistance	:100m Ω Max. (Initial)
Insulation resistance	:100M Ω Min.
Operating force	:250 \pm 50gf
Total travel	:0.35 \pm 0.1mm
Operating life	:100,000 cycles Min
Solder specifications	:260° C for 5 seconds
Function	:Momentary
Operating temperature	:+10° C ~ +60° C



A

B

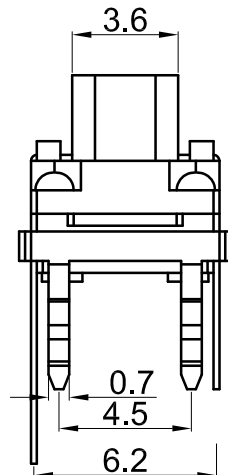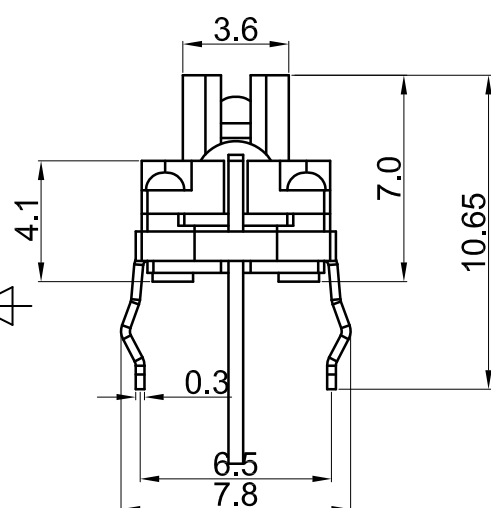



B

C

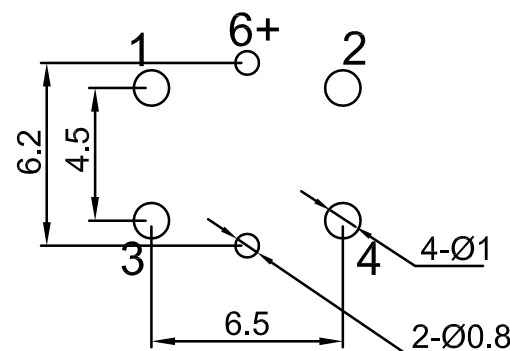LED 2.2VDC, Forward Current 20mA**P.C.B. LAYOUT****CIRCUIT**

C

D

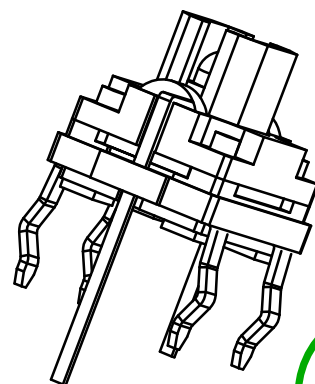

PRODUCT NAME

Switch 7x7x7mm TH with LED

SUNROM.COM

D

PRODUCT URL

<https://www.sunrom.com/c/7x7x7mm-led>

DATE

01/09/2025

1

2

5

6