


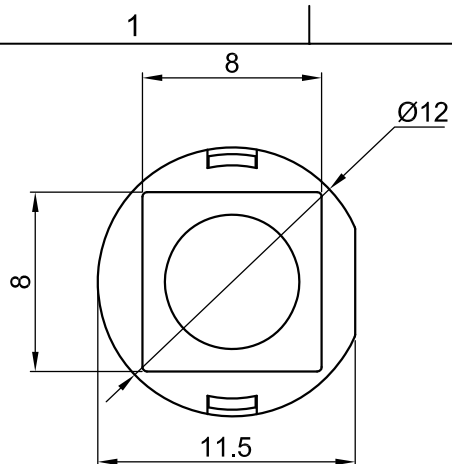
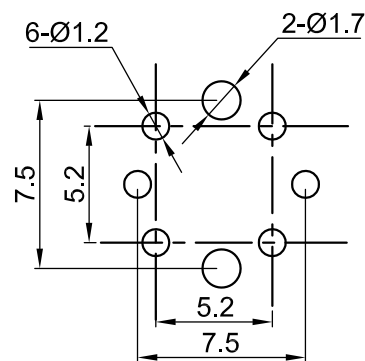


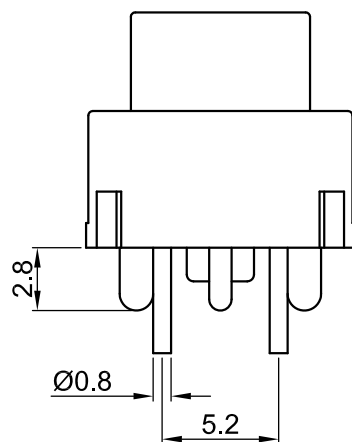


Specifications


Circuit	:Push (NO)
Current rating	:30mA
Voltage rating	:30VDC
Dielectric withstanding voltage	:500VAC for 1 minute
Contact resistance	:100m Ω Max. (Initial)
Insulation resistance	:100M Ω Min
Operating force	:200 $\pm$ 50gf
Total travel	:0.7mm $\pm$ 0.2mm
Operating life	:100,000 cycles Min.
Solder specifications	:256 $^{\circ}$ C for 5 seconds
Operating temperature	:+10 $^{\circ}$ C ~ +60 $^{\circ}$ C

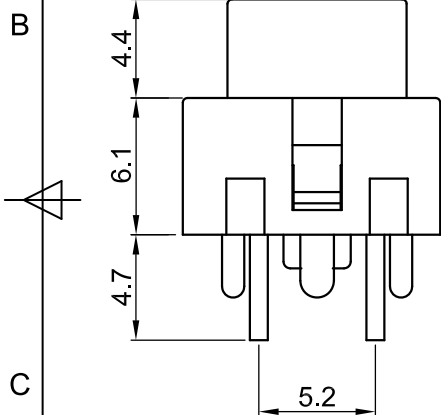

P.C.B.LAYOUT



CIRCUIT

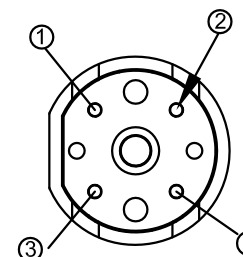

MATERIAL:

Frame:Nylon66,UL rated:94V-2 Min. ;
Cap:ABS;
Terminal:Brass, Tin plated.

PRODUCT NAME

Tact Key Switch Square cap

PRODUCT URL

<https://www.sunrom.com/c/tact-key-switch>

SUNROM.COM

DATE

01/09/2025