

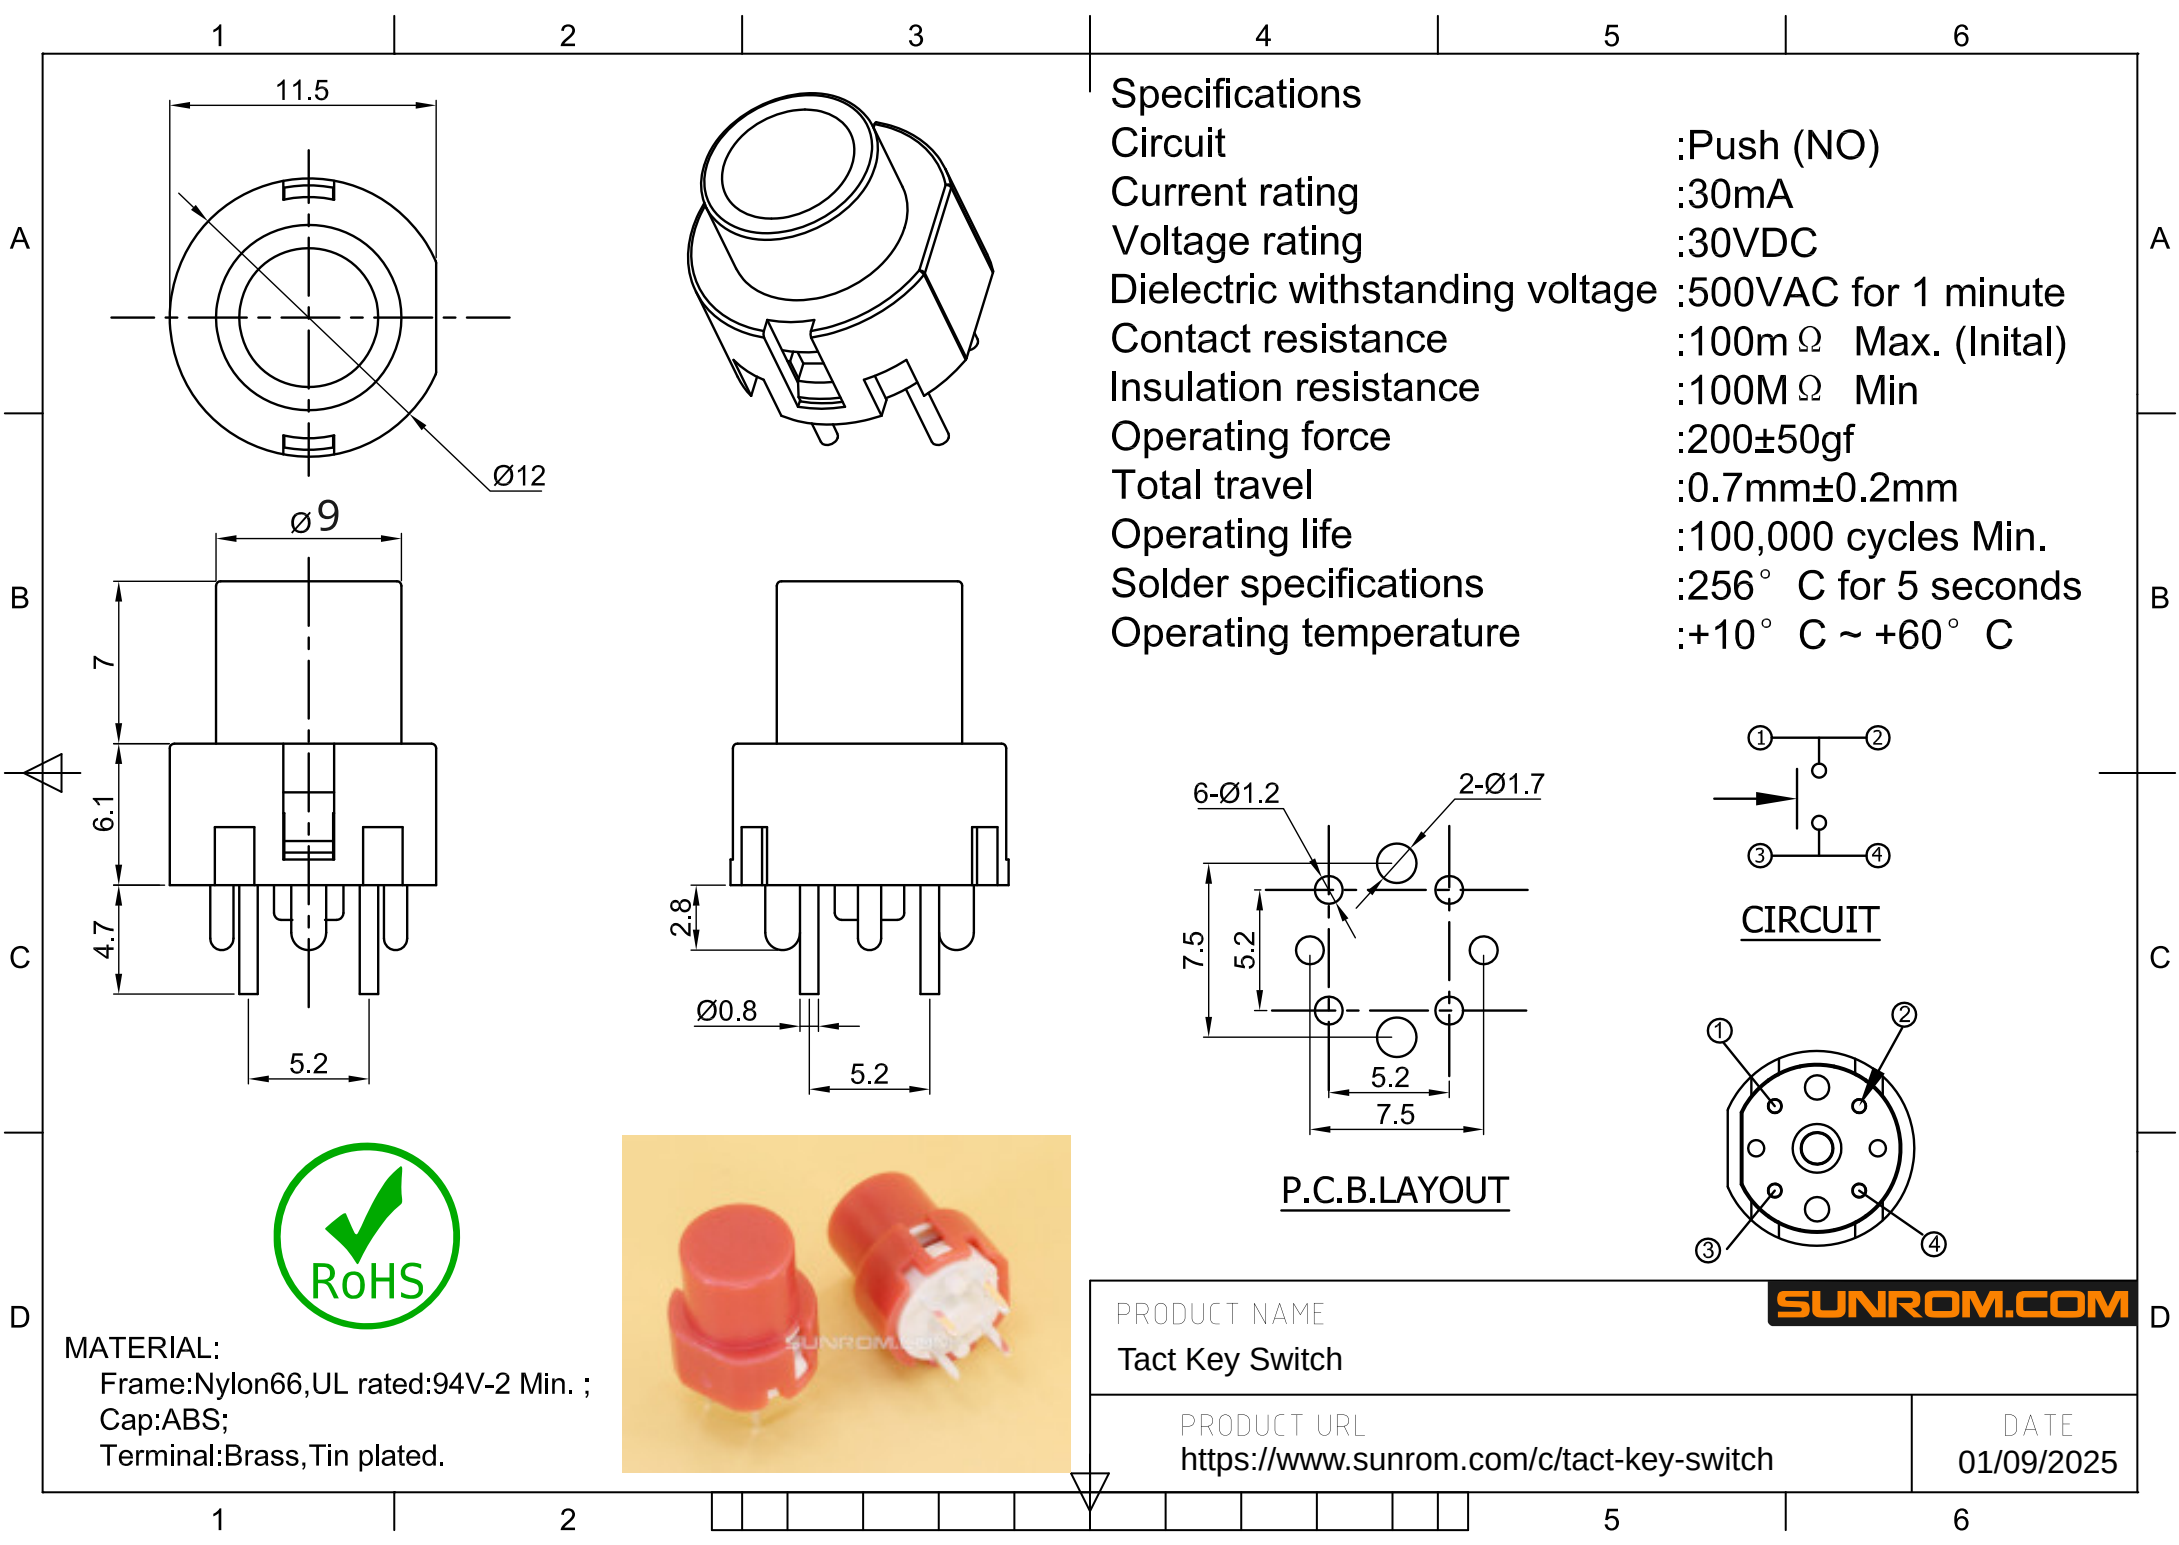





Specifications

Circuit	:Push (NO)
Current rating	:30mA
Voltage rating	:30VDC
Dielectric withstanding voltage	:500VAC for 1 minute
Contact resistance	:100mΩ Max. (Initial)
Insulation resistance	:100MΩ Min
Operating force	:200±50gf
Total travel	:0.7mm±0.2mm
Operating life	:100,000 cycles Min.
Solder specifications	:256° C for 5 seconds
Operating temperature	:+10° C ~ +60° C

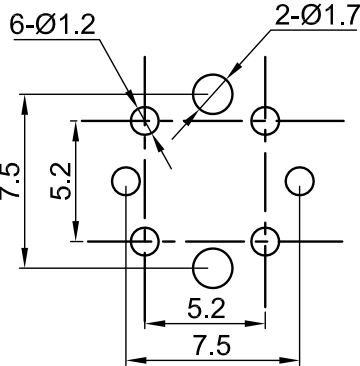

MATERIAL:
Frame:Nylon66,UL rated:94V-2 Min. ;
Cap:ABS;
Terminal:Brass,Tin plated.



PRODUCT NAME
Tact Key Switch

PRODUCT URL
<https://www.sunrom.com/c/tact-key-switch>

SUNROM.COM

DATE
01/09/2025