


△△△ SPECIFICATION

Current Rate:3 Amp
 Withstand Voltage:500V AC For 1 Minute
 Contact Resistance:20 Milliohms Max.
 At DC 100mA
 Insulation Resistance:5000 Megaohms Min.
 At 500V DC
 Housing:PBT+30%G.F.(UL94-V0)
 Contact:Brass,Gold Flash Over Nickel
 Operating Temperature:-55°C~+105°C
 RoHS Compliant

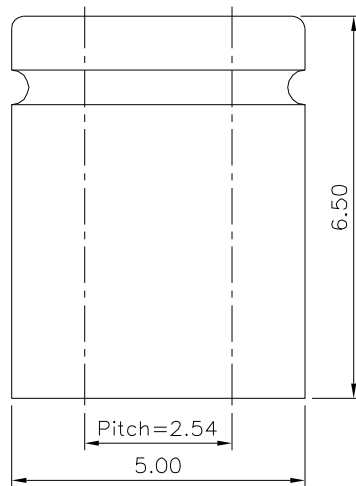

Black <https://www.sunrom.com/m/3305>

Red <https://www.sunrom.com/m/7456>

White <https://www.sunrom.com/m/7455>

Yellow <https://www.sunrom.com/m/7458>

Green <https://www.sunrom.com/m/7457>

sunrom.com

2 pin Shorting Jumper Shunt

DRAWING No. **△△△**

APPROVED BY
MEI

CHECKED BY
HZF

DRAWING BY
CYP

SCALE NONE

REV. A4

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 .X ±0.30
 .XX ±0.20
 ANG. ±3°

UNIT mm

△	A4	Modify Data	HZF	12/05/2019
△	A3	Modify Data	HZF	07/18/2017
△	A2	Modify Data	HZF	10/16/2013
△	A1	Modify Data	HZF	12/15/2009
△	A0	NEW RELEASE	MEI	06/02/1999
NO. REV.	REVISIONS		CHK	DATE