
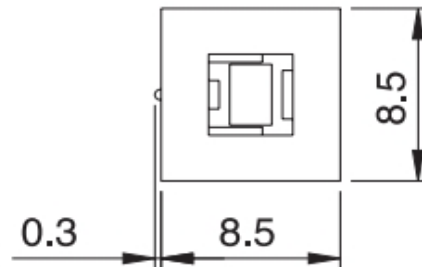






PUSH ON/OFF SWITCH 8.5MM

Push to ON, Push to OFF

DIMENSIONS

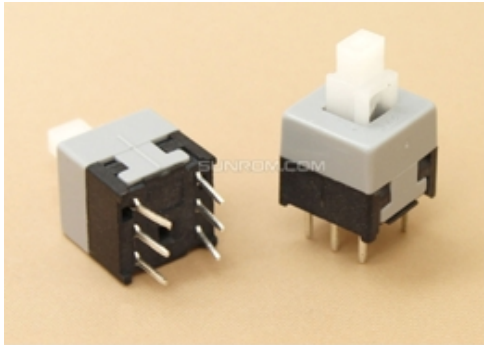

CIRCUIT DIAGRAM

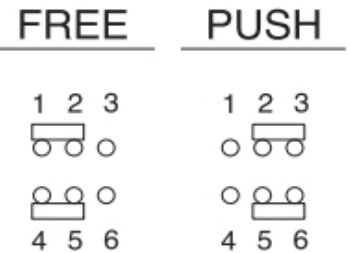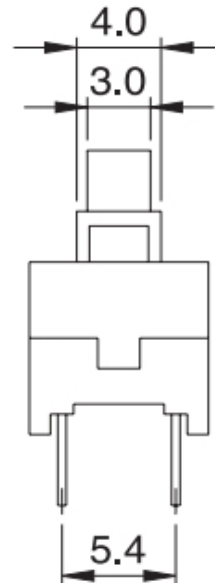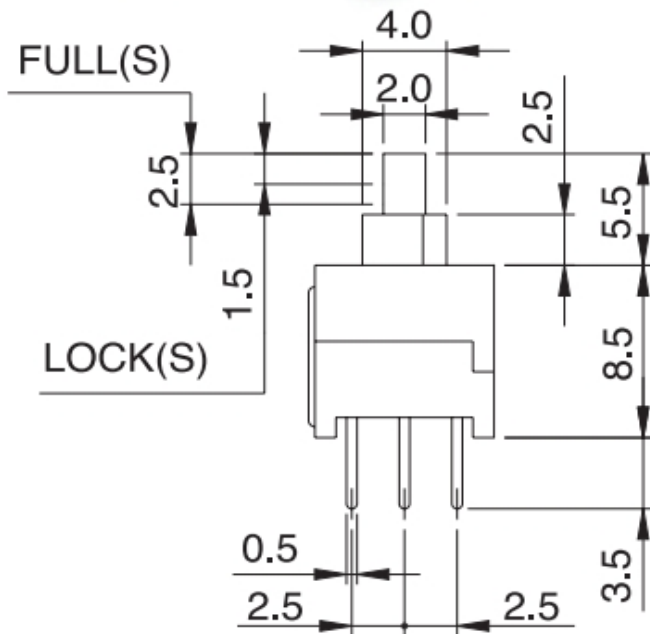

SUNROM.COM

SPECIFICATIONS

Specifications

- CONTACT RATING: 0.1A @ 30 VDC
- INITIAL CONTACT RESISTANCE: 30 m ohms max.
- INSULATION RESISTANCE: 100 M ohms min.
- DIELECTRIC STRENGTH: 500 V AC (50-60 Hz) between open terminals and between the frame and terminal.
- OPERATING LIFE: 10,000 cycles with load
- OPERATING FORCE:
- 200 ± 100 gf (1.96 ± 0.98N)
- LOCK TRAVEL: 1 mm
- TOTAL TRAVEL: 2 mm
- OPERATING TEMPERATURE: -20°C to 70°C

Materials

- KNOB: POM Black
- HOUSING: PA Black
- COVER: POM Grey (latch) / White (Mom)
- TERMINAL: Brass, silver plated
- CONTACT CLIP: Phosphor bronze., silver plated
- SPRING: Stainless steel
- HOOK LOCK: Stainless steel (latch)

Dimensions

- FOOTPRINT: 8.5 x 8.5 mm
- HEIGHT: 14 mm

ORDERING DETAILS

Sunrom Part#	Ordering Page
4949	http://www.sunrom.com/m/4949