


RoHS compliant

PRELIMINARY

HF compliant

Order Online <https://www.sunrom.com/m/6195>

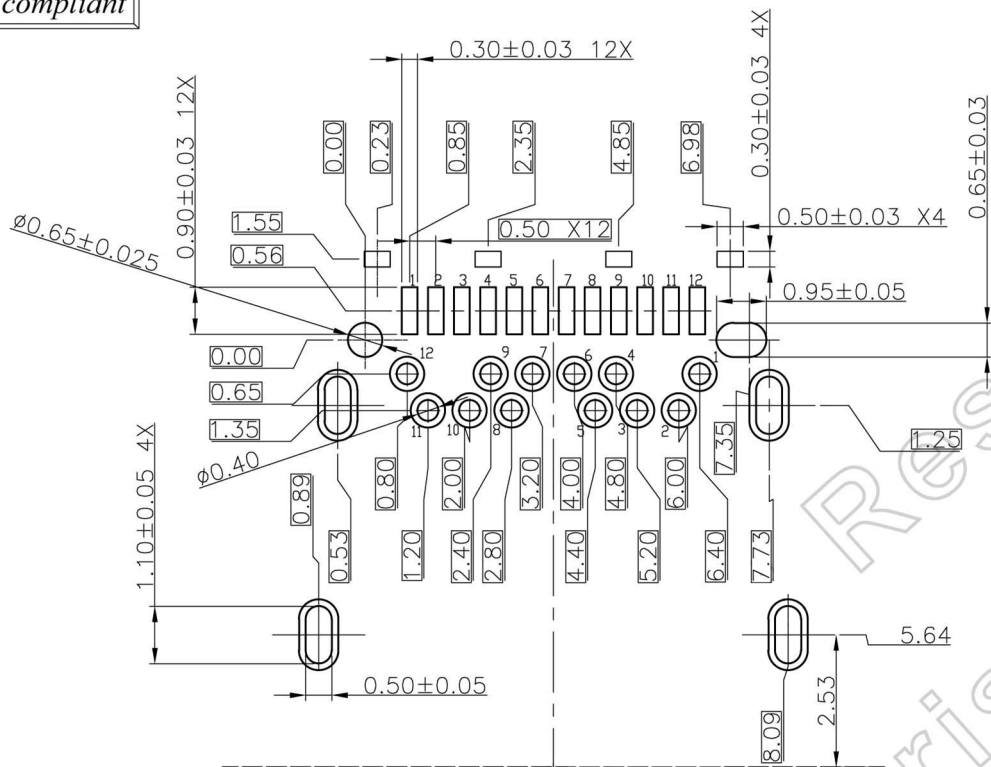

SPECIFICATIONS:

1. MECHANICAL :


- 1.1 INSERTION FORCE :5N~20N
- 1.2 WITHDRAWAL FORCE :8N~20N
- AFTER 10,000 CYCLES MATING: 2N MIN.

2. ELECTRICAL :

- 2.1 CONTACT CURRENT RATING: 3A .
- 2.2 VOLTAGE RATING :30V AC (rms)
- 2.3 WITHSTANDING VOLTAGE: 100 VAC FOR 1 MINUTE.
- INSULATION RESISTANCE: 100 MEGAOHMS MIN.
- 2.4 CONTACT RESISTANCE: 40 MILLIOHMS MAX.

3. ENVIRONMENTAL :

- 3.1 OPERATING TEMPERATURE:-25°C TO +85°C

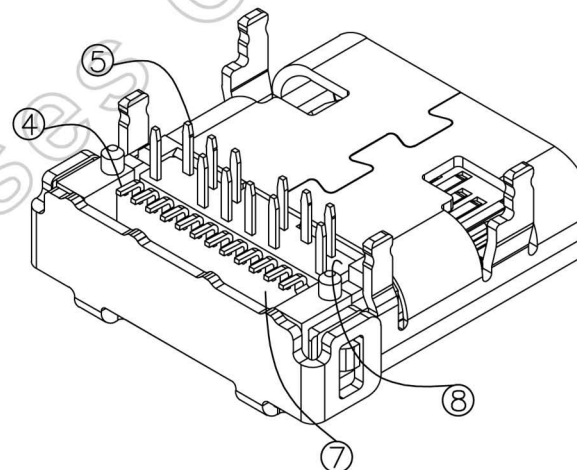

	A		B
1	GND	12	GND
2	SSTXp1	11	SSRXp1
3	SSTXn1	10	SSRXn1
4	VBUS	9	VBUS
5	CC1	8	SUB2
6	Dp1	7	Dn2
7	Dn1	6	Dp2
8	SUB1	5	CC2
9	VBUS	4	VBUS
10	SSRXn2	3	SSTXn2
11	SSRXp2	2	SSTXp2
12	GND	1	GND

CONNECTOR FRONT EDGE
RECOMMENDED P.C.B. LAYOUT (T:1.00mm)
TOLERANCE UNSPECIFIED ±0.05mm

1	THERMOPLASTIC UL94V-0	DIP HOUSING	⑧
1	THERMOPLASTIC UL94V-0	SMT HOUSING	⑦
1	THERMOPLASTIC UL94V-0	LATCH HOUSING	⑥
12	COPPER ALLOY	DIP CONECTOR	⑤
12	COPPER ALLOY	SMT CONECTOR	④
2	SUS	EMI	③
1	SUS	LATCH	②
1	SUS	SHELL	①
QTY'S	MATERIAL	NAME	NO.

MATERIAL:	TOLERANCE UNLESS SPECIFIED:		SCALE:	UNIT:
	.000 ± 0.10		1:1	mm
	.00 ± 0.20			
	.0 ± 0.30			
FINISH:	ANGLE ± 0.50	NAME:	SHEET:	
	± 2'		2 / 2	
	DRAWN:		R/A SMT COVER TYPE	REV.:
	DESIGNER:			0.1
CHECKED:				
APPROVED:	DRAWING NO.:	R-S13KG-03		