
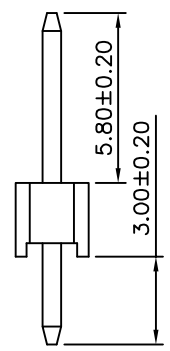
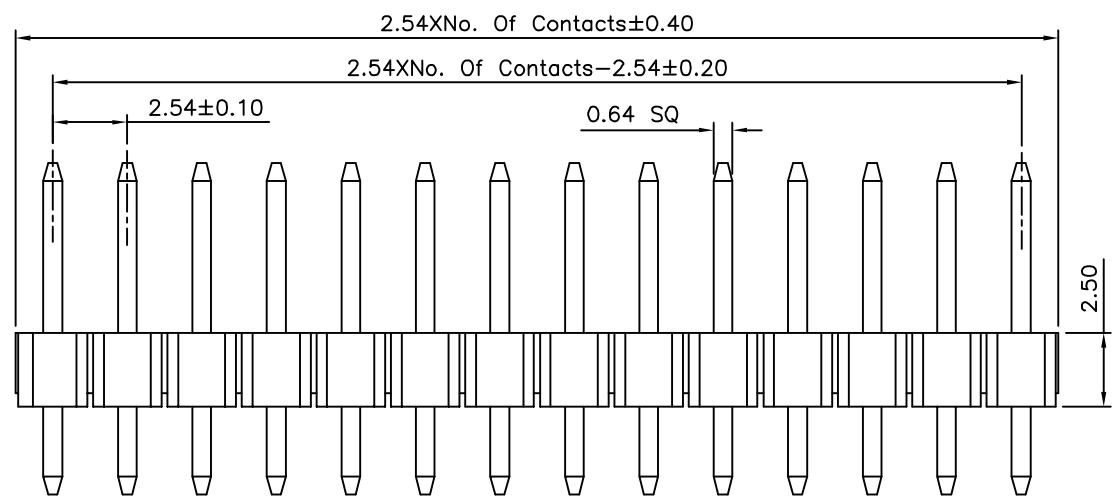


Recommended P.C.B Layout

**SPECIFICATION**  
 Current Rating:3.0 Amp/Contact Max.  
 Withstand Voltage:1000V AC/Minute  
 Contact Resistance:20 Milliohms Max./Contact  
 Insulation Resistance:1000 Megaohms Min. At 100V  
 Operation Temperature:-55°C~+105°C  
 Contact:Brass  
 Insulator:PA6T+30%G.F.(UL94V-0),Black  
 RoHS Compliant

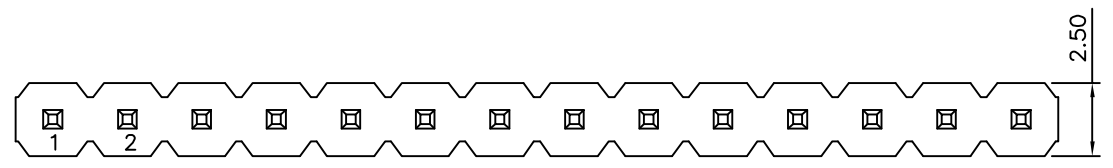

2.54mm 40x1 Male Straight Header Strip

SUNROM.COM

<https://www.sunrom.com/m/3039>

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. $\pm 0.50$ .X $\pm 0.30$ .XX $\pm 0.20$ .XXX $\pm 0.10$ ANG. $\pm 5^\circ$
3039		EM		
		ZF		
		DRAWING BY		
		AO		
SCALE	NONE	REV.	A0	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△ A0		NEW RELEASE	HZF	03/24/2012